




GO TO PRODUCT

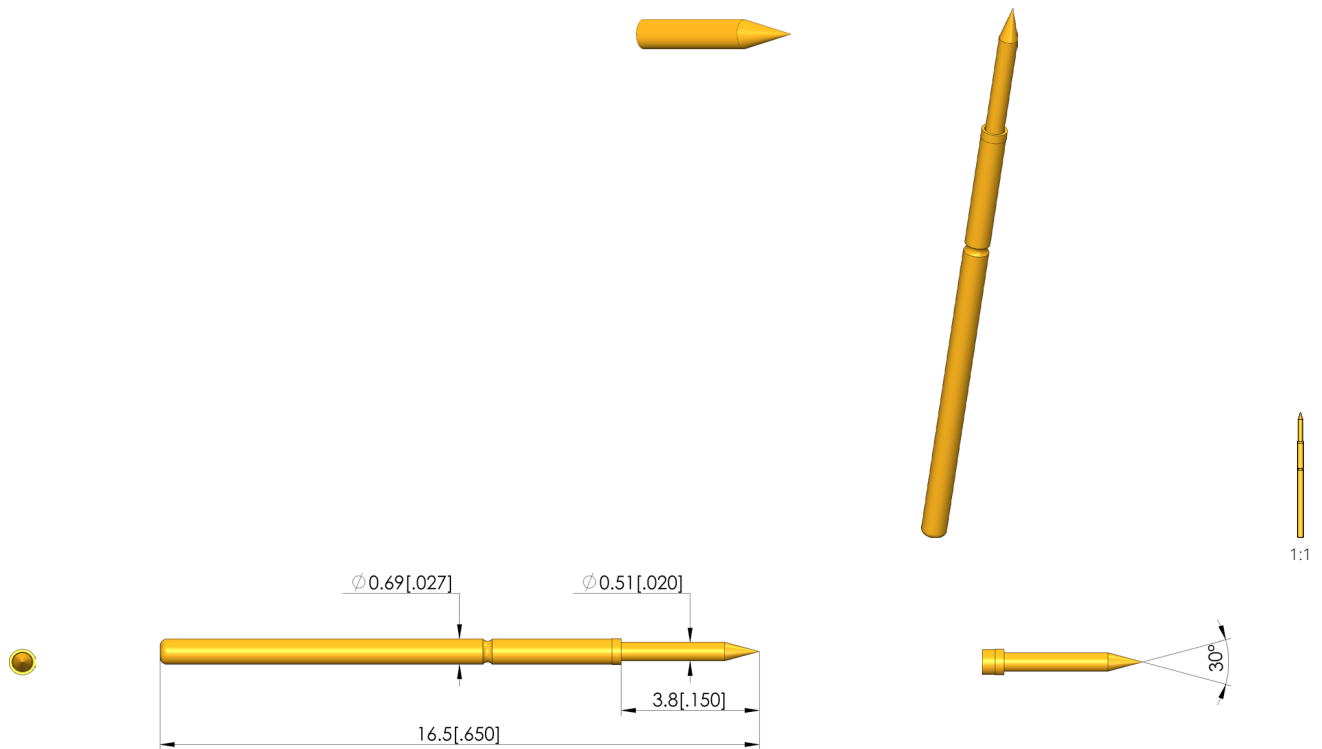

General data

Product group:	ICT / FCT (in-circuit test and function test)
Sub-product group:	Fine-pitch
Series:	GKS-069
Grid:	1.27 mm [50 mil]
Contacting from:	Pad
Magnetic:	Yes
Installation type:	Plug-in
Quick-exchange system:	Yes
Adjustable installation height:	No
Non-rotating:	No
Compatible receptacle(s):	KS-069
Min. temperature:	-40 °C [-40 °F]
Max. temperature:	80 °C [176 °F]
RoHS-compliant:	Yes

Tip style data

Tip style:	01 30° needle tip, self-cleaning
Tip diameter:	0.51 mm [0.02 in]
Tip style surface:	A gold
Tip style material:	2 steel

Electrical data

Current load capacity / rated current:	3 A
Typical resistance (Ri):	20 mOhm

Mechanical data

Total length:	16.5 mm [0.649 in]
Barrel diameter:	0.69 mm [0.027 in]
Maximum stroke:	2.8 mm [0.11 in]
Spring pre-load:	0.42 N [1.51 ozf]
Collar height:	00
Spring force at working stroke:	0.7 N [2.51 ozf]
Recommended working stroke:	2.2 mm [0.086 in]

Test Probe

GKS-069 201 051 A 0700


Item GKS-069-0010



GO TO PRODUCT

ingun®

Partner for Future Technology

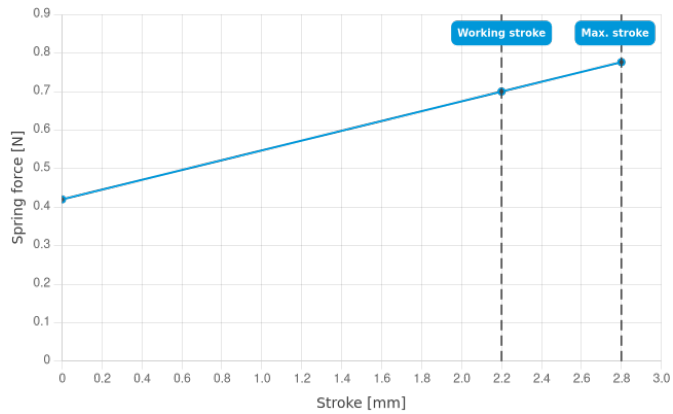

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 06/26_GB

Learn more about
ICT/FCT Test probes



ingun.com

ICT/FCT TEST PROBES