

Battery contacting probe

BCP-150 306 400 A 3002


Item BCP-150-0008

[GO TO PRODUCT](#)

ingun[®]

Partner for Future Technology

- Contacting solution for prismatic and cylindrical cells such as 18600, 21700 and 46xx as well as coin cells
- Current rating upto 15A on Al DUT with temperaturer rise $dT \leq 20\text{ K}$; max. current rating of 50A on high conducting materials like copper alloys
- Designed for a range of cell contacting applications such as formation, AC-IR, open circuit voltage (OCV) measurement and end-of-life (EOL) testing
- Low-resistance contact probe with R_i typical $< 10\text{ m}\Omega$

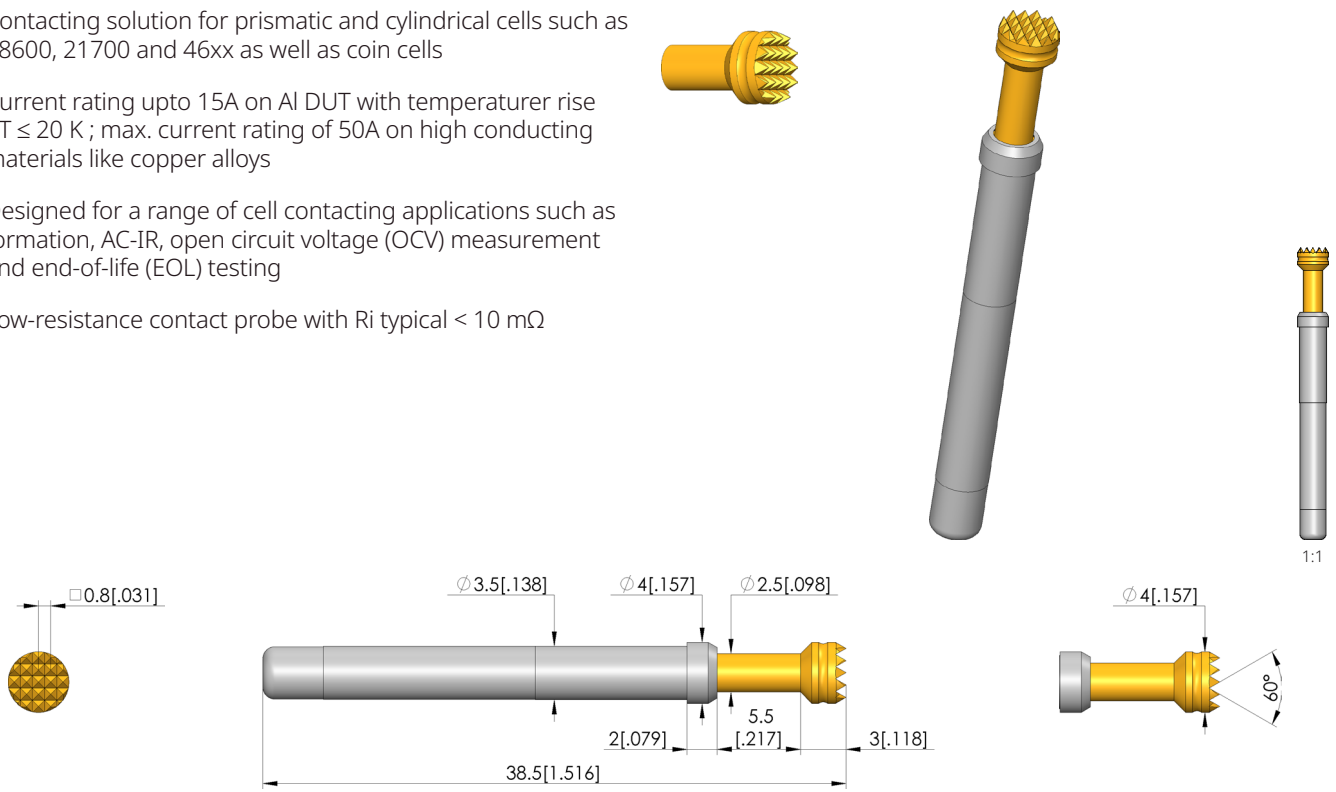

Battery contacting probe

BCP-150 306 400 A 3002

Item BCP-150-0008

[GO TO PRODUCT](#)

ingun[®]

Partner for Future Technology

General data

Product group:	Battery Contacting
Sub-product group:	Standard BCP (press-in)
Series:	BCP-150
Application rec.:	
Grid:	5.08 mm [200 mil]
DUT / contact:	
Magnetic:	Yes
Installation type:	Plug-in
Quick-exchange system:	Yes
Adjustable installation height:	No
Non-rotating:	No
Compatible receptacle(s):	KS-150
Min. temperature:	-100 °C [-148 °F]
Max. temperature:	200 °C [392 °F]
RoHS-compliant:	Yes

Tip style data

Tip style:	06 serrated
Tip diameter:	4 mm [.157 in]
Tip style surface:	A gold
Tip style material:	3 CuBe

Electrical data

Current load capacity / rated current:	50 A
Rated current on copper @ $\Delta T \leq 20$ K:	25 A
Rated current on copper @ $\Delta T \leq 60$ K:	50 A
Rated current on aluminium @ $\Delta T \leq 20$ K:	15 A
Rated current on aluminium @ $\Delta T \leq 60$ K:	35 A
Typical resistance (Ri):	10 mOhm

Mechanical data

Total length:	38.5 mm [1.51 in]
Barrel diameter:	3.5 mm [.137 in]
Maximum stroke:	5.5 mm [.216 in]
Spring pre-load:	1.31 N [4.71 ozf]
Collar height:	02
Spring force at working stroke:	3 N [10.7 ozf]
Recommended working stroke:	4.4 mm [.173 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 06/26_GB

Learn more about
Test probes

