

High-Current Clip Flat Pin

HKF-617 03212 110 A 10002

Item HKF-617-0018




GO TO PRODUCT

ingun[®]

Partner for Future Technology

- Scratch-free contacting of flat contacts with compact design
- During the contacting process the contact lamellae are pressed against the flat connector blades without scratching.
- Current carrying capacity up to max. 40 A, depending on version

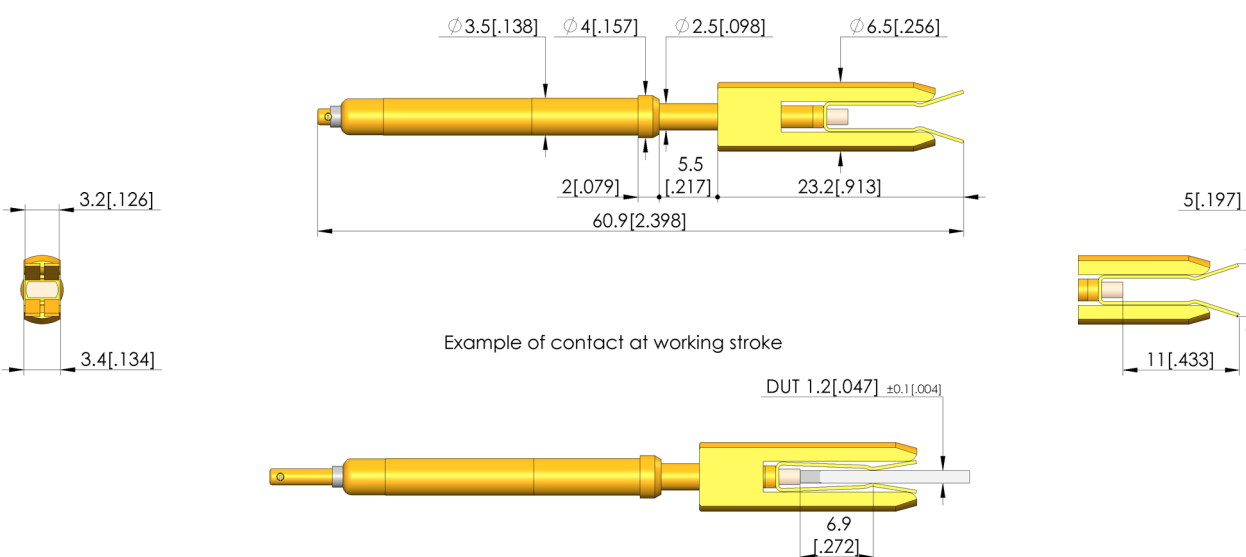

General data

Product group:
 Sub-product group:
 Series:
 Grid:
 Contacting from:
 Magnetic:
 Installation type:
 Quick-exchange system:
 Adjustable installation height:
 Non-rotating:
 Compatible receptacle(s):
 Min. temperature:
 Max. temperature:
 RoHS-compliant:

Clamp contact, flat, high-current
 Clamp contact, flat, high-current
 HKF-617
 7.5 mm [295 mil]
 Flat contact
 Yes
 Bayonet
 Yes
 No
 Yes
 KS-617
 -100 °C [-148 °F]
 150 °C [302 °F]
 Yes

Tip style data

Tip style:
 Tip diameter:
 Tip style surface:
 Tip style material:

00-1 open, slotted
 6.5 mm [.255 in]
 A gold
 6 bronze

Electrical data

Current load capacity / rated current:
 Typical resistance (Ri):

20 A
 10 mOhm

Mechanical data

Total length:
 Barrel diameter:
 Maximum stroke:
 Spring pre-load:
 Collar height:
 Spring force at working stroke:
 Recommended working stroke:

60.9 mm [2.39 in]
 3.5 mm [.137 in]
 5.5 mm [.216 in]
 6.11 N [21.9 ozf]
 02
 10 N [35.9 ozf]
 4.4 mm [.173 in]

HIGH-CURRENT TEST PROBES

High-Current Clip Flat Pin

HKF-617 03212 110 A 10002


Item HKF-617-0018



GO TO PRODUCT

ingun[®]

Partner for Future Technology

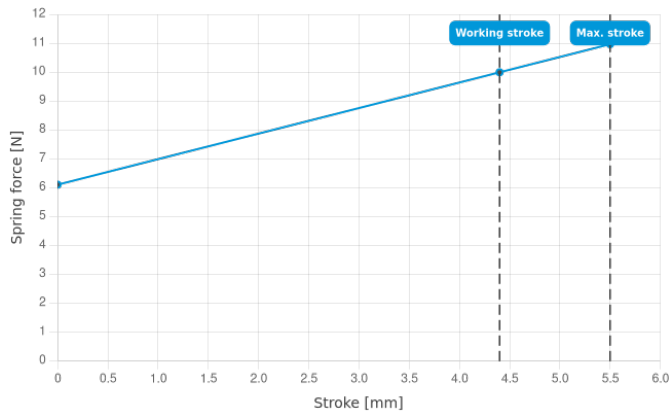

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 05/26_GB

Learn more about
High-current test probes



HIGH-CURRENT TEST PROBES

ingun.com