

# Gas pressure spring cover strut

## FB-GDS-300N-MAxxxx

Item 62852



GO TO PRODUCT


**ingun**<sup>®</sup>

Partner for Future Technology

- Safe, simple, power-assisted opening of the housing
- Assembly kit to replace pre-installed telescopic struts
- For use in standard and tall housings

### Application

Two gas springs in the housing support the safe, simple, power-assisted opening of the housing and increase ease of use.



### General data

Product group:	Functional units
Series:	FB-MAxxxx
Type:	Gas spring cover strut
Version:	MA xxxx
Accessory type:	Additional function
Scope of delivery:	2 x gas spring (GDF) incl. installation accessories
Weight:	1.96 kg [4.32 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes


### Compatible with

Manual test fixtures (MA):

MA xx14

### Technical data

Stroke:	120 mm [4.72 in]
Force:	300 N [1,079 ozf]
Length:	305 mm [12 in]

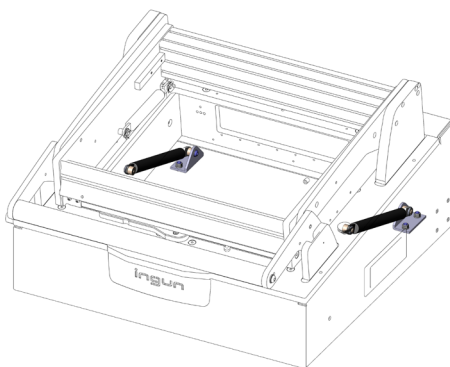

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 05/26\_GB

Learn more about  
MA functional units



FUNCTIONAL UNIT

ingun.com