

PS-HSAL2-M-012-G5-B-01

PS-HSAL2-M-012-G5-B-01

Item 113658



GO TO PRODUCT


ingun[®]

Partner for Future Technology




INGUN SELECTION

- Test plug for the Molex HSAutoLink™ II interconnect system with 12 circuits.
- Consistent radio-frequency performance for signal and data transmission up to 5 GBps.
- Robust shielded test plug to ensure the best signal quality.
- Long service life due to low-wear interior design and optimized abrasion resistance
- Protected signal inner conductor due to protruding outer housing
- Connection to interface using optional 12-pole cable adapter (part 114617)
- Optional spring elements (104148: set of 2) available

NEW

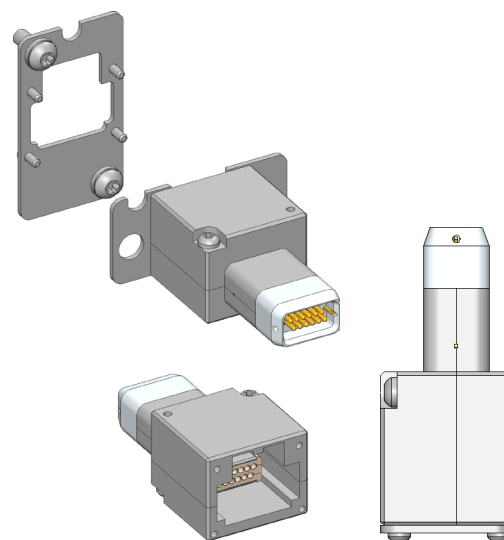

1:1

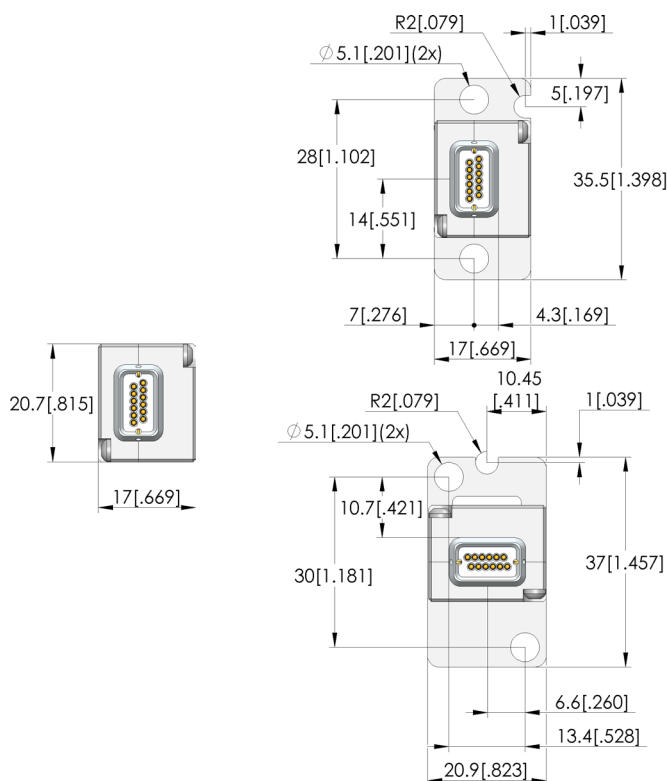

- M3x8 T10 (2x)
- M1.6x4 T5 (4x)
- reducing washer (2x)

PS-HSAL2-M-012-G5-B-01

PS-HSAL2-M-012-G5-B-01

Item 113658



GO TO PRODUCT

ingun[®]

Partner for Future Technology

General data

Product group:	PS test plug
Series:	PS
Sub-series:	PS-HSAL
Grid:	21 mm [826 mil]
DUT / contact:	HSAutolink 2
DUT interface gender :	F signal conductor female / socket
Width:	20.7 mm [.814 in]
Height:	17 mm [.669 in]
Min. temperature:	0 °C [32 °F]
Max. temperature:	50 °C [122 °F]
RoHS-compliant:	Yes

Inner conductor data


Inner conductor maximum stroke:	2.5 mm [.098 in]
Inner conductor max. current load capacity:	1 A
Number of inner conductor poles:	12

Electrical data

Max. data rate:	5 Gbit/s
-----------------	----------

Mechanical data

Total length:	40.3 mm [1.58 in]
---------------	-------------------

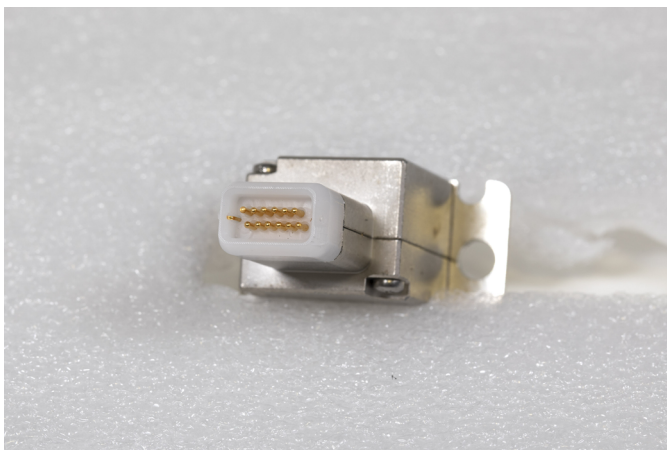

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 06/26_GB

Learn more about
Test probes

