

Gas pressure spring

GDF-305-120-100N-A6-A6

Item 2502



GO TO PRODUCT



ingun[®]

Partner for Future Technology

- Trusted gas springs from the market leader
- Store with the piston rod facing downwards

Note:

The gas springs must be stored with the piston rod pointing downwards so that the seal remains moistened from the inside. It makes no difference whether the piston of the gas spring is extended (unloaded) or retracted (loaded).

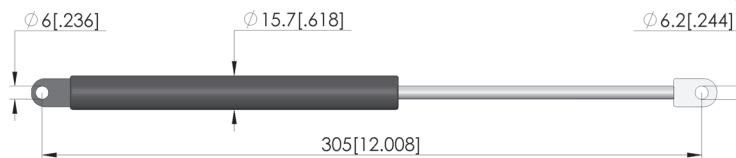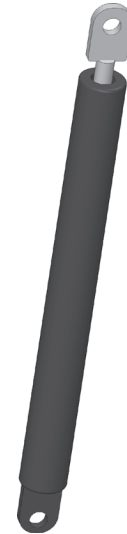

General data

Product group:	Gas springs
Series:	GDF
Type:	Gas spring
Version:	Standard, attenuated
Accessory type:	Spare parts
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

Technical data

Stroke:	120 mm [4.72 in]
Force:	100 N [359 ozf]
Length:	305 mm [12 in]
Gas pressure spring length, home position:	185 mm [7.28 in]
Plunger length, home position:	127 mm [5 in]
Installation 1 diameter:	6 mm [0.236 in]
Installation 2 diameter:	6.2 mm [0.244 in]



INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 06/26_GB