

Vacuum seal

VD-V-VA4040T-2

Item 114554



GO TO PRODUCT




ingun[®]

Partner for Future Technology

- Outstanding service life
- Wartungsarm
- Zuverlässige Abdichtung, für stabile, reproduzierbare Kontaktierungen

Application

Vakuumdichtungen werden in Vakuum-Prüfadaptern verwendet, um ein prozessstabiles Vakuum zu erzeugen, zur Durchführung zuverlässiger Tests (ICT/FCT) an elektronischen Leiterplatten.

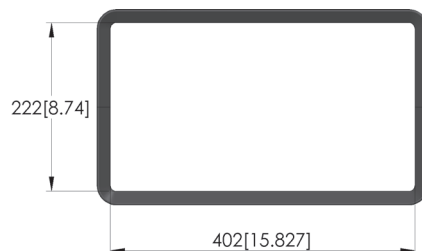

General data

Product group:	Spare part kits
Series:	VD-VAxxxx
Type:	Outer vacuum seal VAxx40T
Version:	Fixed outer dimensions
Accessory type:	Spare parts
Scope of delivery:	Unassembled
Width:	258 mm [10.1 in]
Height:	21 mm [.826 in]
Weight:	0.14 kg [.308 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

Compatible with

Vacuum test fixtures (VA): VA 4040T

Technical data

Useable area (WxD):	185 x 340 mm [7.28 x 13.3 in]
Length:	438 mm [17.2 in]
Outer dimensionS (WxDxH):	258 x 438 x 21 mm [10.1 x 17.2 x .826 in]

Vacuum test fixtures

Part no. EN	Designation	Tip version EN
114637	VA 4040T/D/H	Vacuum test fixture
114624	VA 4040T/D/H/PYLON-12	Vacuum test fixture
114667	VA 4040T/D/H/VPC-G12	Vacuum test fixture
114630	VA 4040T/F/H	Vacuum test fixture
114646	VA 4040T/F/H/GR2270/71	Vacuum test fixture
114659	VA 4040T/F/H/GR228x15/07	Vacuum test fixture
114654	VA 4040T/F/H/GR228x15/15	Vacuum test fixture
114618	VA 4040T/F/H/PYLON-12	Vacuum test fixture
114677	VA 4040T/F/H/VPC-G12	Vacuum test fixture

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Learn more about
Test fixture kits

