




GO TO PRODUCT

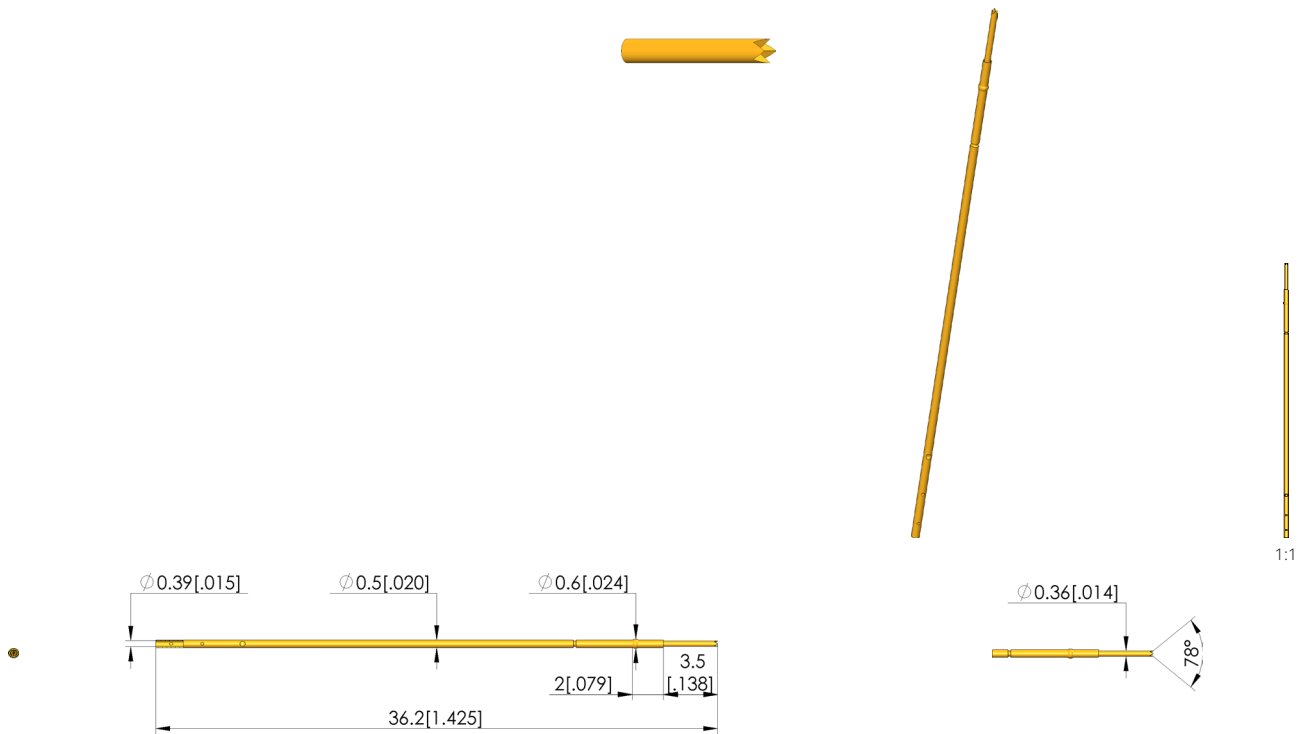

General data

Product group:	ICT / FCT (in-circuit test and function test
Sub-product group:	Fine-pitch
Series:	GKS-061
Grid:	0.8 mm [31.4 mil]
Contacting from:	Pad
Magnetic:	Yes
Installation type:	Plug-in
Quick-exchange system:	No
Type of test probe connection:	Plug
Adjustable installation height:	No
Non-rotating:	No
Compatible connector(s):	SE-061
Min. temperature:	-40 °C [-40 °F]
Max. temperature:	80 °C [176 °F]
RoHS-compliant:	Yes

Tip style data

Tip style:	04 4-point crown
Tip diameter:	0.35 mm [.013 in]
Tip style surface:	A gold
Tip style material:	3 CuBe

Electrical data

Current load capacity / rated current:	2 A
Typical resistance (Ri):	50 mOhm

Mechanical data

Total length:	36.2 mm [1.42 in]
Barrel diameter:	0.5 mm [.019 in]
Maximum stroke:	3.5 mm [.137 in]
Spring pre-load:	0.4 N [1.43 ozf]
Collar height:	02
Spring force at working stroke:	0.6 N [2.15 ozf]
Recommended working stroke:	2.5 mm [.098 in]

Test Probe

GKS-061 304 035 A 0602


Item GKS-061-0001



GO TO PRODUCT

ingun®

Partner for Future Technology

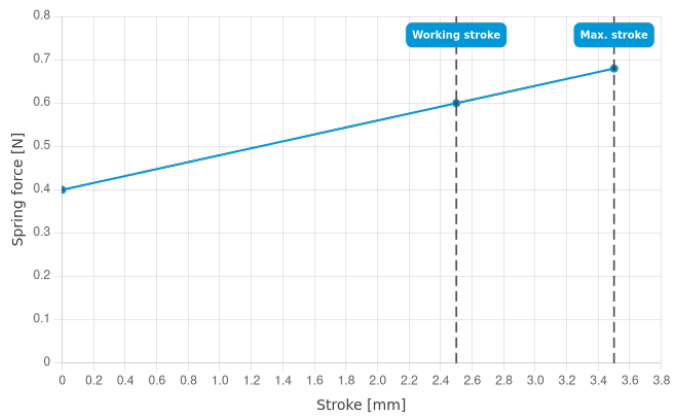

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 06/26_GB

Learn more about
ICT/FCT Test probes



ICT/FCT TEST PROBES

ingun.com