

Test Probe INGUN E-Type

E-100 291 090 A 3000

Item E-100-0001



GO TO PRODUCT


ingun[®]

Partner for Future Technology

- Highest contact reliability under challenging test conditions without additional stress on the DUT: up to 25% larger contact surface between test probe and DUT
- When hitting the test surface a spring force up to 100% higher than a standard GKS is available, but the same spring force as a standard GKS is achieved at the working stroke.
- Dimensions equivalent to the standard GKS series



INGUN SELECTION

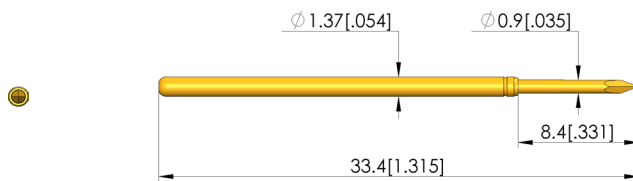

General data

| | |
|---------------------------------|---|
| Product group: | ICT / FCT (in-circuit test and function test) |
| Sub-product group: | INGUN E-TYPE® |
| Series: | E-100 |
| Grid: | 2.54 mm [100 mil] |
| Contacting from: | Via |
| Magnetic: | Yes |
| Installation type: | Plug-in |
| Quick-exchange system: | Yes |
| Adjustable installation height: | No |
| Non-rotating: | No |
| Compatible receptacle(s): | KS-100 |
| Min. temperature: | -40 °C [-40 °F] |
| Max. temperature: | 80 °C [176 °F] |
| RoHS-compliant: | Yes |

Tip style data

| | |
|---------------------|--------------------------|
| Tip style: | 91 dagger, self-cleaning |
| Tip diameter: | 0.9 mm [0.035 in] |
| Tip style surface: | A gold |
| Tip style material: | 2 steel |

Electrical data

| | |
|--|---------|
| Current load capacity / rated current: | 5 A |
| Typical resistance (Ri): | 20 mOhm |

Mechanical data

| | |
|---------------------------------|--------------------|
| Total length: | 33.4 mm [1.31 in] |
| Barrel diameter: | 1.37 mm [0.053 in] |
| Maximum stroke: | 6.35 mm [.25 in] |
| Spring pre-load: | 1.87 N [6.72 ozf] |
| Collar height: | 00 |
| Spring force at working stroke: | 3 N [10.7 ozf] |
| Recommended working stroke: | 4.3 mm [0.169 in] |

Test Probe INGUN E-Type

E-100 291 090 A 3000


Item E-100-0001



GO TO PRODUCT

ingun®

Partner for Future Technology

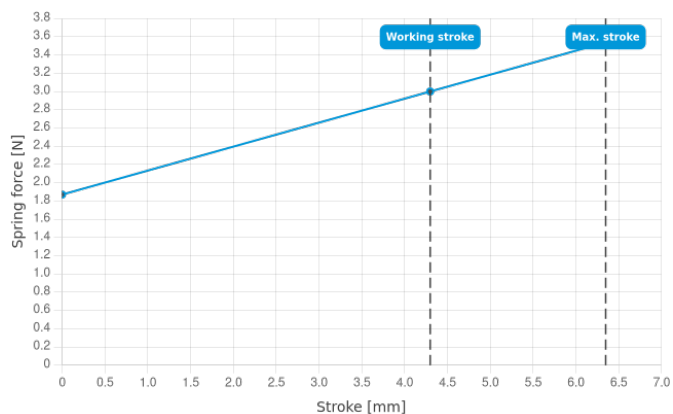

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 07/26_GB

Learn more about
ICT/FCT Test probes



ICT/FCT TEST PROBES

ingun.com