




GO TO PRODUCT

INGUN SELECTION

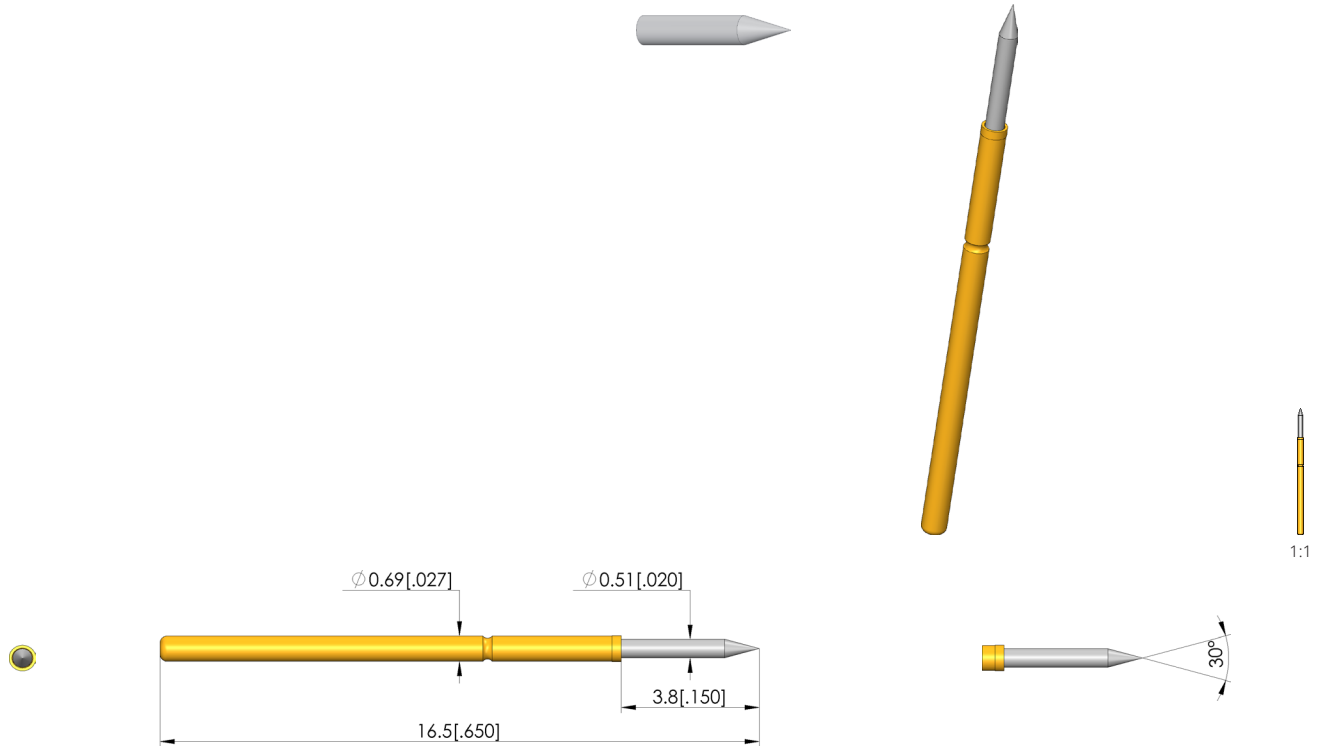

General data

Product group: ICT / FCT (in-circuit test and function test)
 Sub-product group: Fine-pitch
 Series: GKS-069
 Grid: 1.27 mm [50 mil]
 Contacting from: Pad
 Magnetic: Yes
 Installation type: Plug-in
 Quick-exchange system: Yes
 Adjustable installation height: No
 Non-rotating: No
 Compatible receptacle(s): KS-069
 Min. temperature: -40 °C [-40 °F]
 Max. temperature: 80 °C [176 °F]
 RoHS-compliant: Yes

Product group: ICT / FCT (in-circuit test and function test)
 Sub-product group: Fine-pitch
 Series: GKS-069
 Grid: 1.27 mm [50 mil]
 Contacting from: Pad
 Magnetic: Yes
 Installation type: Plug-in
 Quick-exchange system: Yes
 Adjustable installation height: No
 Non-rotating: No
 Compatible receptacle(s): KS-069
 Min. temperature: -40 °C [-40 °F]
 Max. temperature: 80 °C [176 °F]
 RoHS-compliant: Yes

Tip style data

Tip style: 01 30° needle tip, self-cleaning
 Tip diameter: 0.51 mm [.02 in]
 Tip style surface: N nickel
 Tip style material: 2 steel

Tip style: 01 30° needle tip, self-cleaning
 Tip diameter: 0.51 mm [.02 in]
 Tip style surface: N nickel
 Tip style material: 2 steel

Electrical data

Current load capacity / rated current: 3 A
 Typical resistance (Ri): 20 mOhm

Current load capacity / rated current: 3 A
 Typical resistance (Ri): 20 mOhm

Mechanical data

Total length: 16.5 mm [.649 in]
 Barrel diameter: 0.69 mm [.027 in]
 Maximum stroke: 2.8 mm [.11 in]
 Spring pre-load: 0.42 N [1.51 ozf]
 Collar height: 00
 Spring force at working stroke: 0.7 N [2.51 ozf]
 Recommended working stroke: 2.2 mm [.086 in]

Test Probe

GKS-069 201 051 N 0700


Item GKS-069-0002



GO TO PRODUCT

ingun®

Partner for Future Technology

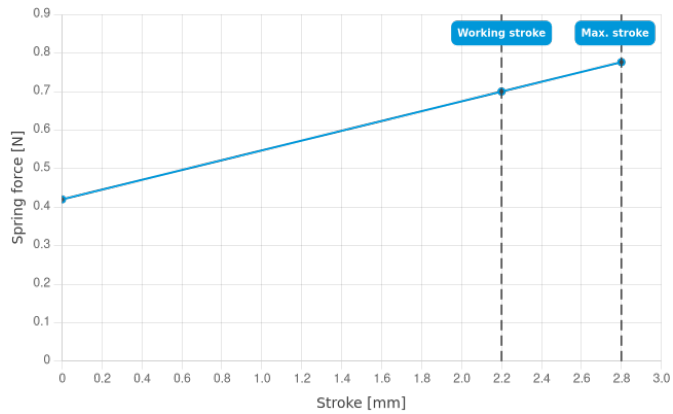

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 05/26_GB

Learn more about
ICT/FCT Test probes



ingun.com