




GO TO PRODUCT

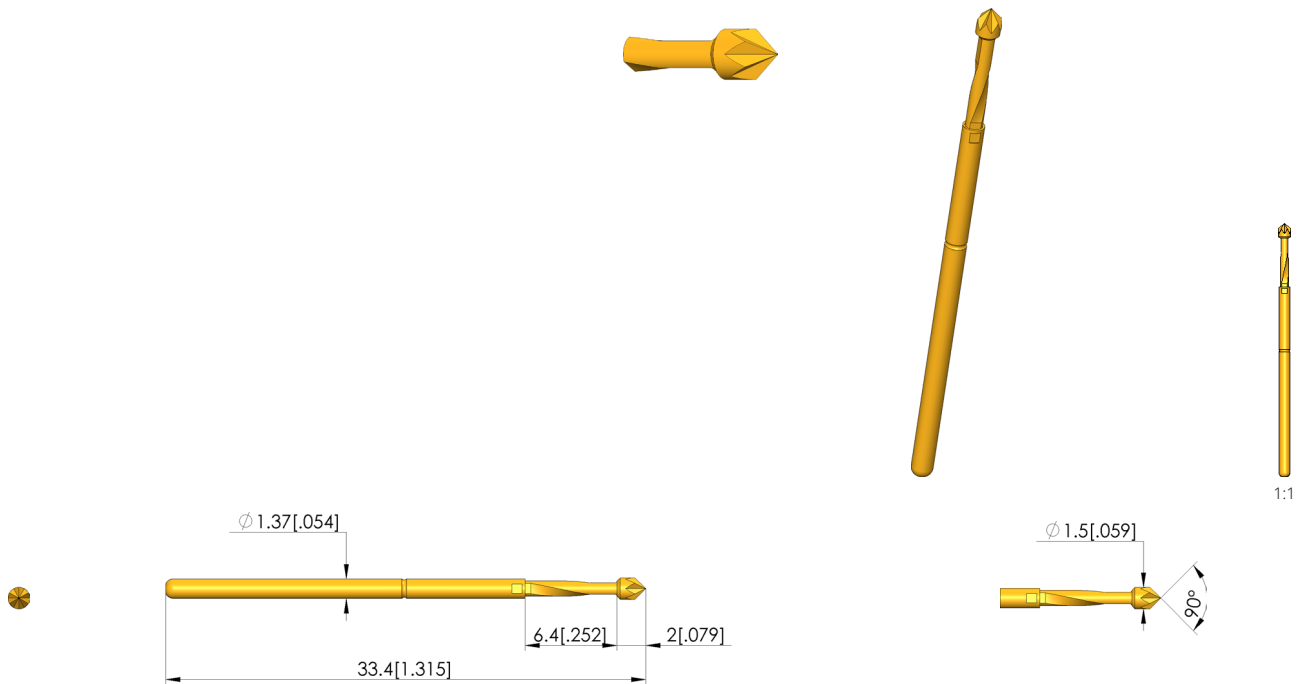

**General data**

Product group:	ICT / FCT (in-circuit test and function test)
Sub-product group:	Rotating test probes
Series:	DKS-100
Grid:	2.54 mm [100 mil]
Contacting from:	Via
Magnetic:	Yes
Installation type:	Plug-in
Quick-exchange system:	Yes
Adjustable installation height:	No
Non-rotating:	No
Compatible receptacle(s):	KS-100
Min. temperature:	-40 °C [-40 °F]
Max. temperature:	80 °C [176 °F]
RoHS-compliant:	Yes

**Tip style data**

Tip style:	17 hexagonal pyramid with cutting edges, self-cleaning
Tip diameter:	1.5 mm [.059 in]
Tip style surface:	G aurun
Tip style material:	2 steel

**Electrical data**

Current load capacity / rated current:	5 A
Typical resistance (Ri):	20 mOhm

**Mechanical data**

Total length:	33.4 mm [1.31 in]
Barrel diameter:	1.37 mm [.053 in]
Maximum stroke:	6.35 mm [.25 in]
Spring pre-load:	0.93 N [3.34 ozf]
Collar height:	00
Spring force at working stroke:	2 N [7.19 ozf]
Recommended working stroke:	4.3 mm [.169 in]

# Test Probe

## DKS-100 217 150 G 2000


Item DKS-100-0002



GO TO PRODUCT

# ingun®

Partner for Future Technology

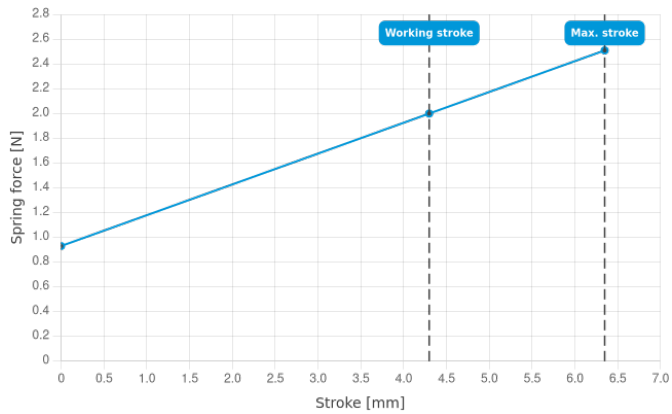

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 05/26\_GB

Learn more about  
ICT/FCT Test probes



ICT/FCT TEST PROBES

ingun.com