

Test Probe

GKS-069 303 152 A 0700

Item GKS-069-0012




GO TO PRODUCT

ingun®

Partner for Future Technology

INGUN SELECTION

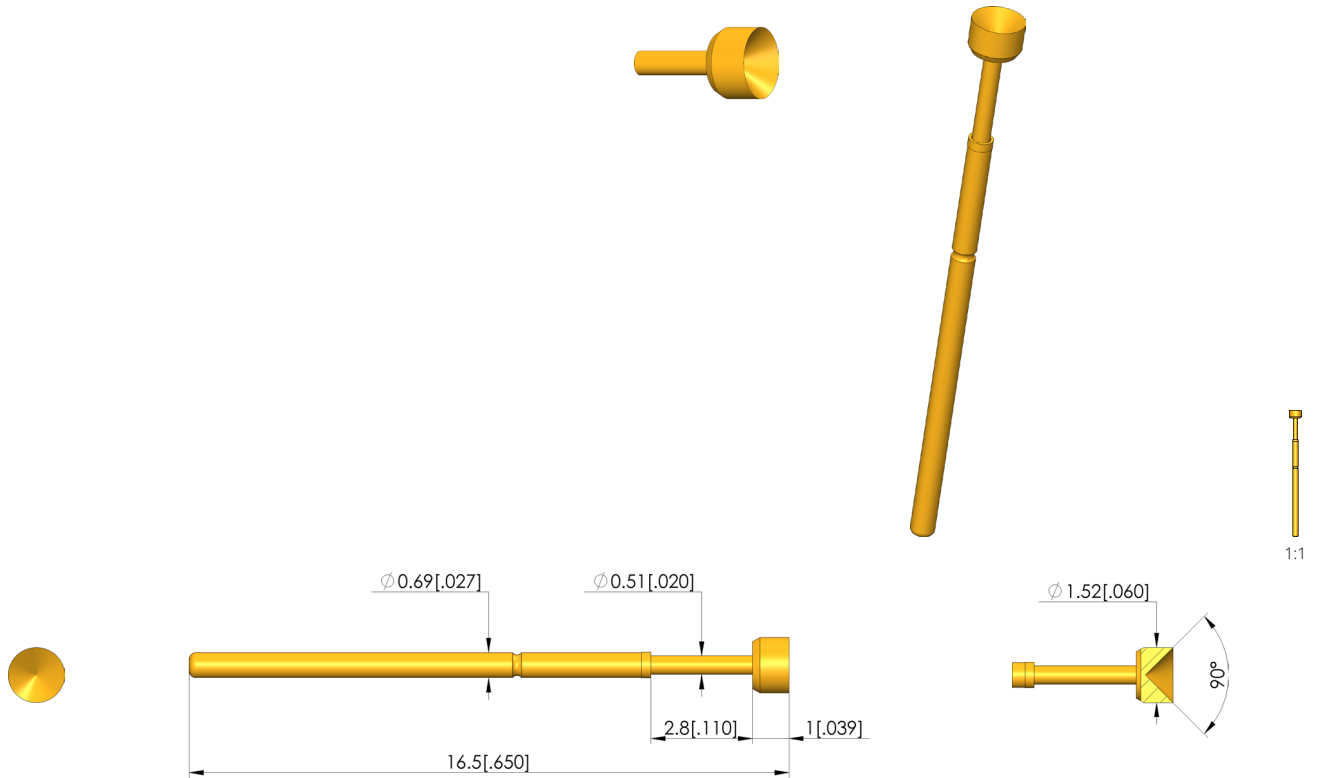

General data

Product group:
Sub-product group:
Series:
Grid:
Contacting from:
Magnetic:
Installation type:
Quick-exchange system:
Adjustable installation height:
Non-rotating:
Compatible receptacle(s):
Min. temperature:
Max. temperature:
RoHS-compliant:

ICT / FCT (in-circuit test and function test)
Fine-pitch
GKS-069
1.91 mm [75.1 mil]
Post
Yes
Plug-in
Yes
No
KS-069
-40 °C [-40 °F]
80 °C [176 °F]
Yes

Tip style data

Tip style:
Tip diameter:
Tip style surface:
Tip style material:

03 inverse cone
1.52 mm [.059 in]
A gold
3 CuBe

Electrical data

Current load capacity / rated current:
Typical resistance (Ri):

3 A
20 mOhm

Mechanical data

Total length:
Barrel diameter:
Maximum stroke:
Spring pre-load:
Collar height:
Spring force at working stroke:
Recommended working stroke:

16.5 mm [.649 in]
0.69 mm [.027 in]
2.8 mm [.11 in]
0.42 N [1.51 ozf]
00
0.7 N [2.51 ozf]
2.2 mm [.086 in]

Test Probe


GKS-069 303 152 A 0700

Item GKS-069-0012



ingun®

Partner for Future Technology

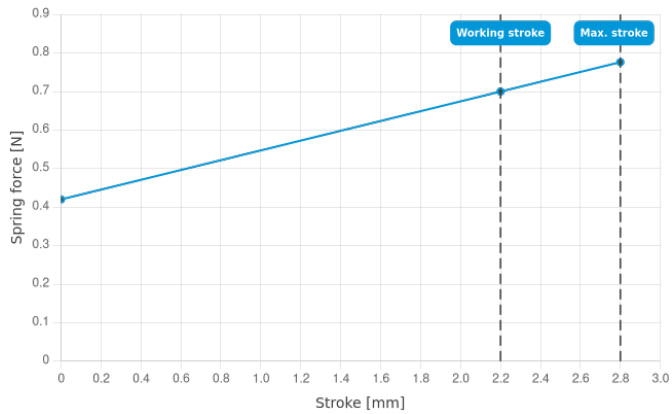

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 05/26_GB

Learn more about
ICT/FCT Test probes



ingun.com