


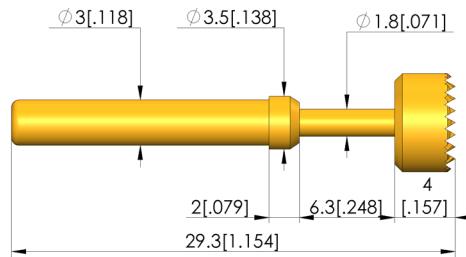




GO TO PRODUCT

- Robust test probes with distinctive collar (stop) on the barrel
- Optimum adjustment of the stroke ratios in the test fixture: The collar is available in different heights, which, in combination with the receptacles, allows a range of installation heights
- Stainless steel versions for temperatures from -100 °C up to +200 °C available

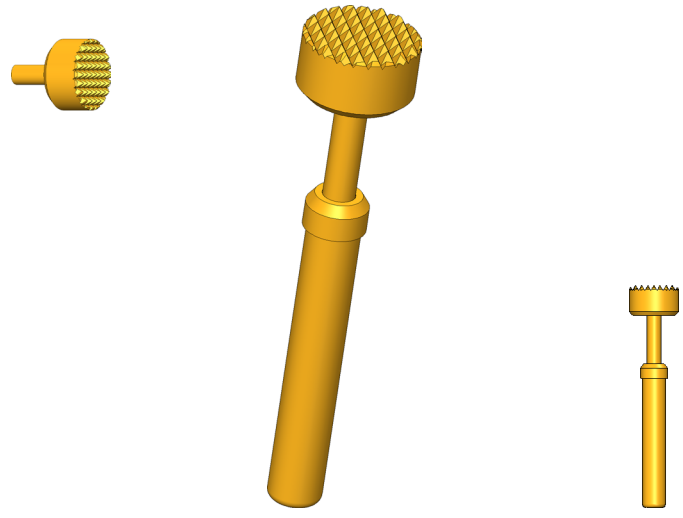

General data

Product group:
 Sub-product group:
 Series:
 Grid:
 Contacting from:
 Magnetic:
 Installation type:
 Quick-exchange system:
 Adjustable installation height:
 Non-rotating:
 Compatible receptacle(s):
 Min. temperature:
 Max. temperature:
 RoHS-compliant:

ICT / FCT (in-circuit test and function test)
 Metric standard
 GKS-103
 7 mm [275 mil]
 Post
 Yes
 Plug-in
 Yes
 No
 No
 KS-103 23
 -40 °C [-40 °F]
 80 °C [176 °F]
 Yes

Tip style data

Tip style: 06 serrated
 Tip diameter: 6.5 mm [.255 in]
 Tip style surface: A gold
 Tip style material: 2 steel

Electrical data

Current load capacity / rated current: 5 A
 Typical resistance (Ri): 30 mOhm

Mechanical data

Total length: 29.3 mm [1.15 in]
 Barrel diameter: 3 mm [.118 in]
 Maximum stroke: 6 mm [.236 in]
 Spring pre-load: 0.44 N [1.58 ozf]
 Collar height: 02
 Spring force at working stroke: 1.5 N [5.39 ozf]
 Recommended working stroke: 4.8 mm [.188 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
 78467, Constance, Germany
 Phone +49 7531 8105-0
 Customer hotline +49 7531 8105-888
 Fax +49 7531 8105-65
 info@ingun.com



Learn more about
 ICT/FCT Test probes

