


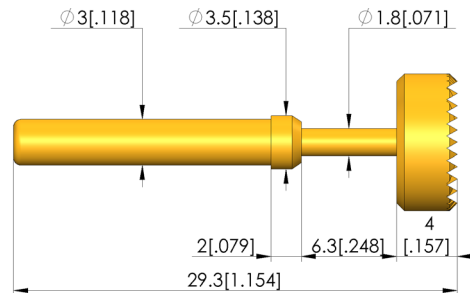




- Robust test probes with distinctive collar (stop) on the barrel
- Optimum adjustment of the stroke ratios in the test fixture: The collar is available in different heights, which, in combination with the receptacles, allows a range of installation heights
- Stainless steel versions for temperatures from -100 °C up to +200 °C available

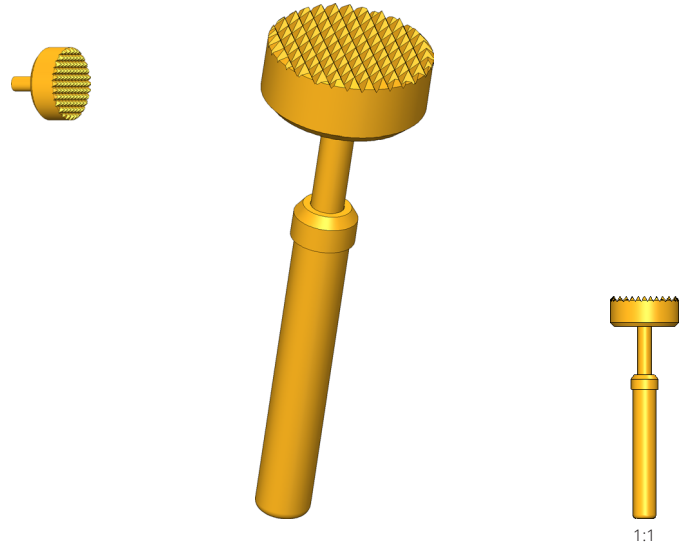

General data

Product group:
Sub-product group:
Series:
Grid:
Contacting from:
Magnetic:
Installation type:
Quick-exchange system:
Adjustable installation height:
Non-rotating:
Compatible receptacle(s):
Min. temperature:
Max. temperature:
RoHS-compliant:

ICT / FCT (in-circuit test and function test)
Metric standard
GKS-103
10 mm [393 mil]
Post
Yes
Plug-in
Yes
No
No
KS-103 23
-40 °C [-40 °F]
80 °C [176 °F]
Yes

Tip style data

Tip style: 06 serrated
Tip diameter: 9 mm [.354 in]
Tip style surface: A gold
Tip style material: 2 steel

Electrical data

Current load capacity / rated current: 5 A
Typical resistance (Ri): 30 mOhm

Mechanical data

Total length: 29.3 mm [1.15 in]
Barrel diameter: 3 mm [.118 in]
Maximum stroke: 6 mm [.236 in]
Spring pre-load: 1.47 N [5.28 ozf]
Collar height: 02
Spring force at working stroke: 5 N [17.9 ozf]
Recommended working stroke: 4.8 mm [.188 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Learn more about
ICT/FCT Test probes

