


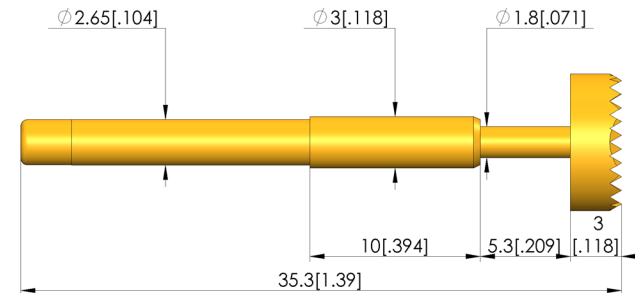




- Robust test probes with distinctive collar (stop) on the barrel
- Optimum adjustment of the stroke ratios in the test fixture: The collar is available in different heights, which, in combination with the receptacles, allows a range of installation heights
- Stainless steel versions for temperatures from -100 °C up to +200 °C available

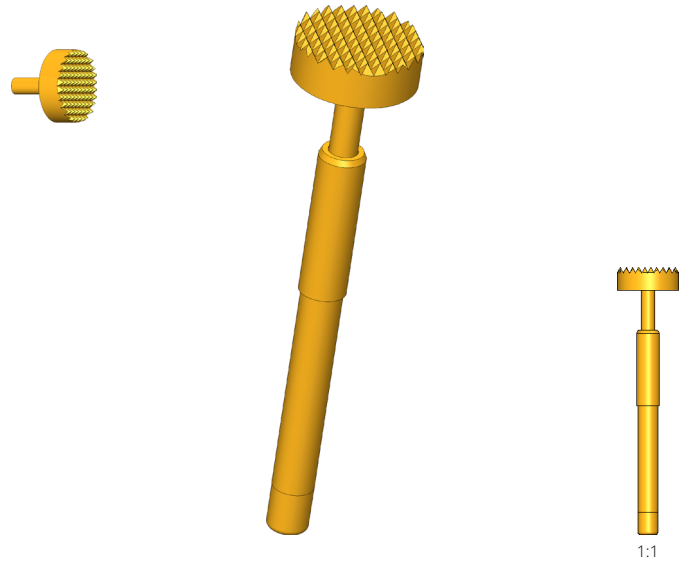

General data

Product group:
 Sub-product group:
 Series:
 Grid:
 Contacting from:
 Magnetic:
 Installation type:
 Quick-exchange system:
 Adjustable installation height:
 Non-rotating:
 Compatible receptacle(s):
 Min. temperature:
 Max. temperature:
 RoHS-compliant:

ICT / FCT (in-circuit test and function test)
 Metric standard
 GKS-113
 8.5 mm [334 mil]
 Post
 Yes
 Plug-in
 Yes
 No
 No
 KS-113
 -40 °C [-40 °F]
 80 °C [176 °F]
 Yes

Tip style data

Tip style:
 Tip diameter:
 Tip style surface:
 Tip style material:

06 serrated
 8 mm [.314 in]
 A gold
 3 CuBe

Electrical data

Current load capacity / rated current:
 Typical resistance (Ri):

8 A
 30 mOhm

Mechanical data

Total length:
 Barrel diameter:
 Maximum stroke:
 Spring pre-load:
 Collar height:
 Spring force at working stroke:
 Recommended working stroke:

35.3 mm [1.38 in]
 2.65 mm [.104 in]
 5.3 mm [.208 in]
 1.36 N [4.89 ozf]
 10
 5 N [17.9 ozf]
 4 mm [.157 in]

Test Probe

GKS-113 306 800 A 5010


Item GKS-113-1000



GO TO PRODUCT

ingun®

Partner for Future Technology

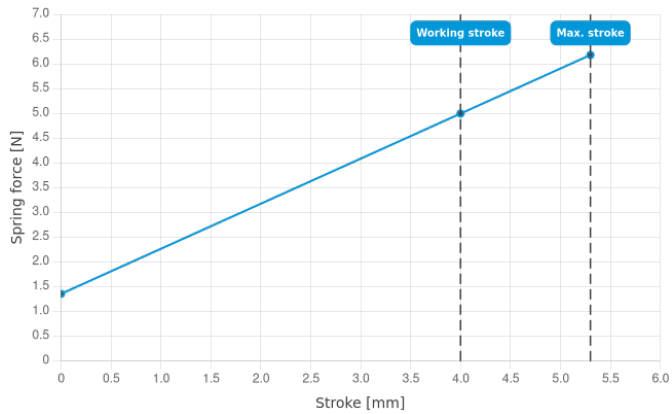

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 06/26_GB

Learn more about
ICT/FCT Test probes



ingun.com

ICT/FCT TEST PROBES