

# Pressure frame unit NDH-535-480-VL-ESD


Item 35476



GO TO PRODUCT

**ingun**<sup>®</sup>

Partner for Future Technology

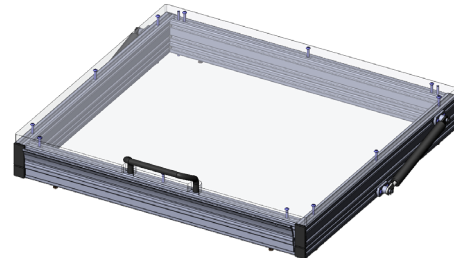

## General data

Product group:  
Series:  
Type:  
Version:  
Accessory type:  
Width:  
Height:  
Min. temperature:  
Max. temperature:

Mounted units  
NDH-VAxxxx  
ESD  
Locking strip  
Additional function  
578 mm [22.7 in]  
100 mm [3.93 in]  
10 °C [50 °F]  
60 °C [140 °F]

## Compatible with

Exchangeable kits version:

No limitations

## Technical data

Pushrod length: 55.6 mm [2.18 in]  
Free space above PCB: 54 mm [2.12 in]  
Pressure frame opening angle: 85 °  
Bearing distance: 495 x 440 x 60 mm [19.4 x 17.3 x 2.36 in]  
Useable area (WxD): 455 x 400 mm [17.9 x 15.7 in]  
Length: 513 mm [20.1 in]  
Outer dimensionS (WxDxH): 578 x 513 x 100 mm [22.7 x 20.1 x 3.93 in]

## INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 05/26\_GB

Learn more about  
Test fixture kits

