

Test Probe

GKS-354 102 580 U 4000

Item GKS-354-0001




GO TO PRODUCT

ingun[®]

Partner for Future Technology

NEW

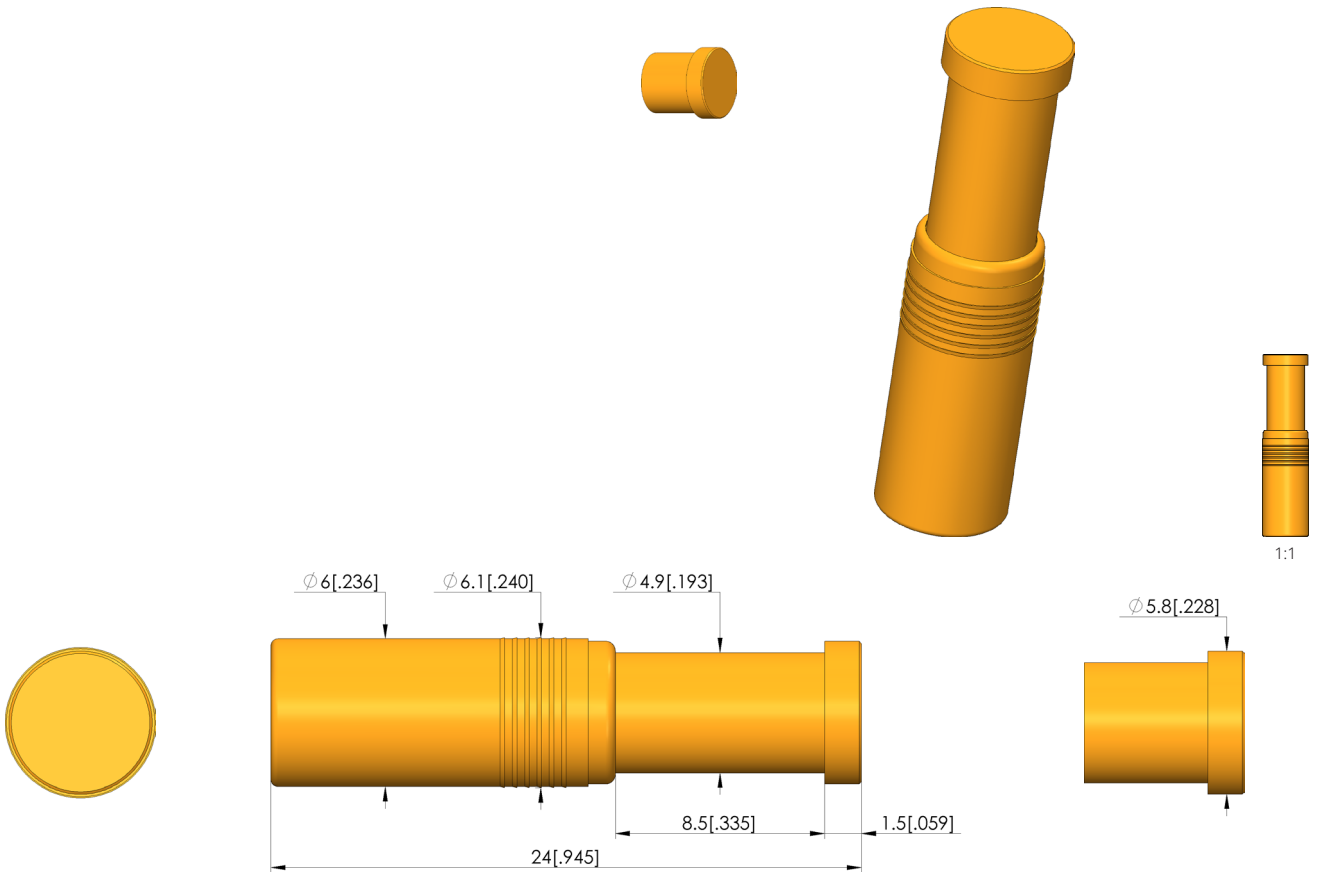

General data

Product group:
Sub-product group:
Series:
Grid:
Contacting from:
Magnetic:
Installation type:
Quick-exchange system:
Adjustable installation height:
Non-rotating:
Min. temperature:
Max. temperature:
RoHS-compliant:

Accessories (GKS / ADA)
PCB support pins
GKS-354
6.5 mm [255 mil]
Post
No
Press-in
No
No
-100 °C [-148 °F]
200 °C [392 °F]
Yes

Tip style data

Tip style:
Tip diameter:
Tip style surface:
Tip style material:

02 flat
5.8 mm [.228 in]
U unplated
1 brass

Mechanical data

Total length:
Barrel diameter:
Maximum stroke:
Spring pre-load:
Collar height:
Spring force at working stroke:
Recommended working stroke:
Mounting hole in probe plate (KTP):

24 mm [.944 in]
6 mm [.236 in]
7.5 mm [.295 in]
1.47 N [5.28 ozf]
00
4 N [14.3 ozf]
6 mm [.236 in]
6.05 - 6.07 mm [.238 in]

Test Probe

GKS-354 102 580 U 4000


Item GKS-354-0001



GO TO PRODUCT

ingun[®]

Partner for Future Technology

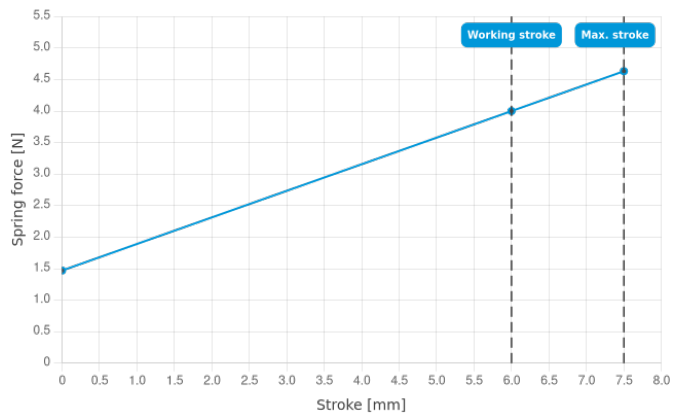

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 05/26_GB

Learn more about
Test probes

