

# PS-HSAL2-S-M-006-G5-B-01

## PS-HSAL2-S-M-006-G5-B-01

Item 116019




GO TO PRODUCT




**ingun**<sup>®</sup>

Partner for Future Technology

- Applications mainly for future technologies in automotive sector (e.g. camera devices, info-tainment, telematics, navigation, autonomous driving)
- For HS Autolink II differential connector
- Consistent RF signal and data transmission
- Protected signal inner conductor due to protruding outer housing.
- Long service life due to low-wear interior design and optimized abrasion resistance
- Connection of the interface only via original cable HS Autolink II or INGUN cable adapter, 6-pin or 12-pin
- Optional floating system can be used
- Test plugs with various mounting brackets for side-by-side or stacked mounting

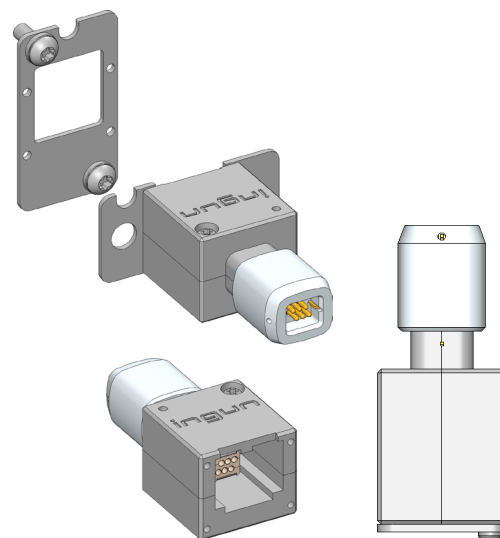

1:1

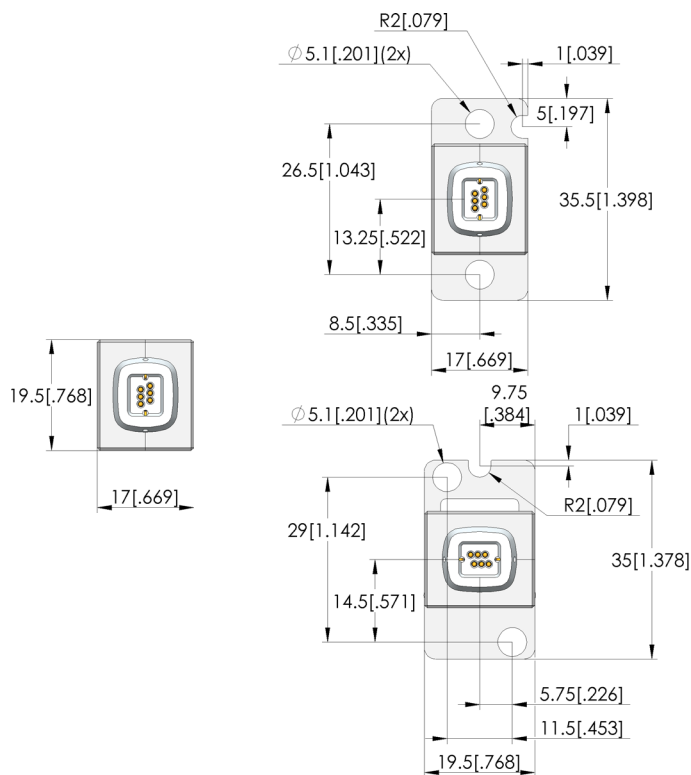

- M3x8 T10 (2x)
- M1.6x4 T5 (2x)
- reducing washer (2x)

# PS-HSAL2-S-M-006-G5-B-01

## PS-HSAL2-S-M-006-G5-B-01

Item 116019



GO TO PRODUCT

**ingun**<sup>®</sup>

Partner for Future Technology

### General data

Product group: PS test plug  
Series: PS  
Sub-series: PS-HSAL  
Grid: 20 mm [787 mil]  
DUT / contact: HSAutolink , sealed  
DUT interface gender : F signal conductor female / socket  
Width: 19.5 mm [.767 in]  
Height: 17 mm [.669 in]  
Min. temperature: 0 °C [32 °F]  
Max. temperature: 50 °C [122 °F]  
RoHS-compliant: Yes

### Inner conductor data

Number of inner conductors: 6  
Inner conductor maximum stroke: 2.5 mm [.098 in]  
Inner conductor max. current load capacity: 1 A  
Number of inner conductor poles: 6

### Electrical data

Max. data rate: 5 Gbit/s

### Mechanical data

Total length: 41.5 mm [1.63 in]

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 06/26\_GB

Learn more about  
**Test probes**

