

Vacuum seal VD-Z-19-XXX-XXX-2

Item 46795



GO TO PRODUCT

ingun®

Partner for Future Technology





- Vacuum-free zone seal with variable dimensions
- Compatible with VA 20xx 2-stage test fixtures

Application

Vakuumdichtungen werden in Vakuum-Prüfadaptern verwendet, um ein prozessstabiles Vakuum zu erzeugen, zur Durchführung zuverlässiger Tests (ICT/FCT) an elektronischen Leiterplatten.

Note:

Vakuumdichtungen mit der Bezeichnung „VD-Z“ werden zur Gestaltung von vakuumfreien Zonen verwendet, um elektronische Leiterplatten unter normalen Umgebungsbedingungen (Standardatmosphäre) prüfen zu können.

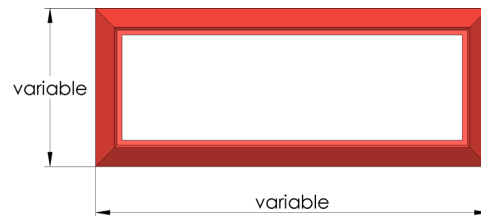

General data

Product group:	Spare part kits
Series:	VD-Z
Type:	Vacuum-free zone sealing for VA20xx
Version:	Dual-stage, variable outer dimensions
Accessory type:	Customising accessories
Material:	Elastosil ®
Colour:	Light red
Height:	19 mm [.748 in]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

Compatible with

Vacuum test fixtures (VA):

VA 20xx

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 06/26_GB

Learn more about
Test fixture kits

