

**General data**

Product group:	ICT / FCT (in-circuit test and function test)
Sub-product group:	Fine-pitch
Series:	GKS-038
Grid:	0.64 mm [25.1 mil]
Contacting from:	Via
Magnetic:	Yes
Installation type:	Plug-in
Quick-exchange system:	No
Type of test probe connection:	Solder connection
Adjustable installation height:	No
Non-rotating:	No
Min. temperature:	-40 °C [-40 °F]
Max. temperature:	80 °C [176 °F]
RoHS-compliant:	Yes

**Tip style data**

Tip style:	08 90°conical, self-cleaning
Tip diameter:	0.28 mm [.011 in]
Tip style surface:	A gold
Tip style material:	3 CuBe

**Electrical data**

Current load capacity / rated current:	1 A
Typical resistance (Ri):	100 mOhm

**Mechanical data**

Total length:	24 mm [.944 in]
Barrel diameter:	0.38 mm [.014 in]
Maximum stroke:	2.5 mm [.098 in]
Spring pre-load:	0.14 N [.503 ozf]
Collar height:	00
Spring force at working stroke:	0.4 N [1.43 ozf]
Recommended working stroke:	2 mm [.078 in]

# Test Probe

## GKS-038 308 028 A 0400


Item GKS-038-0003



GO TO PRODUCT

# ingun®

Partner for Future Technology

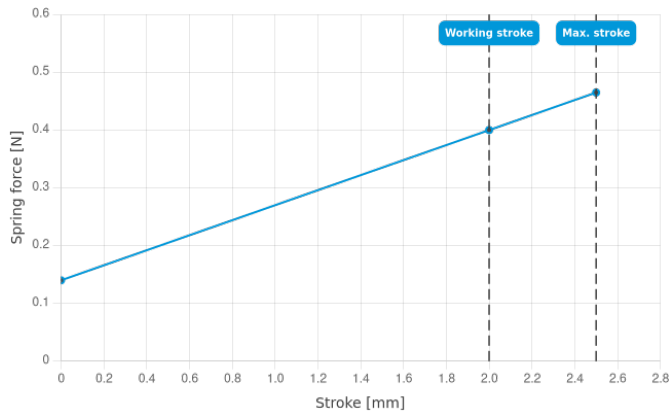

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 05/26\_GB

Learn more about  
ICT/FCT Test probes



ingun.com