

# Vacuum seal VD-V-4040-2

Item 100974



GO TO PRODUCT



**ingun**<sup>®</sup>

Partner for Future Technology

- Outstanding service life
- Wartungsarm
- Zuverlässige Abdichtung, für stabile, reproduzierbare Kontaktierungen

## Application

Vakuumdichtungen werden in Vakuum-Prüfadaptoren verwendet, um ein prozessstabiles Vakuum zu erzeugen, zur Durchführung zuverlässiger Tests (ICT/FCT) an elektronischen Leiterplatten.

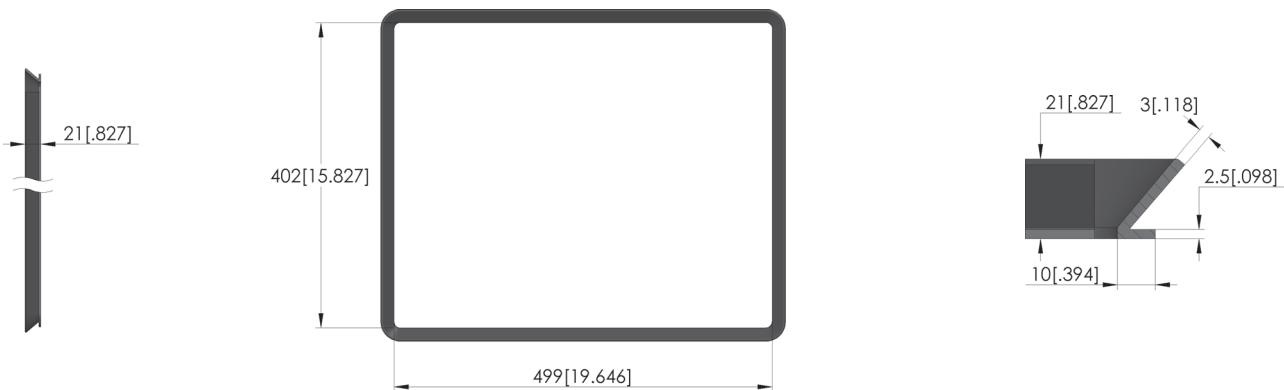

## General data

Product group:	Spare part kits
Series:	VD-VAxxxx
Type:	Outer vacuum seal VAXx40
Version:	Fixed outer dimensions
Accessory type:	Spare parts
Scope of delivery:	Unassembled
Width:	535 mm [21 in]
Height:	21 mm [.826 in]
Weight:	0.19 kg [.418 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

## Compatible with

Vacuum test fixtures (VA):

VA 4040

## Technical data

Useable area (WxD):

450 x 350 mm [17.7 x 13.7 in]

Length:

438 mm [17.2 in]

Outer dimensionS (WxDxH):

535 x 438 x 21 mm [21 x 17.2 x .826 in]

# Vacuum seal VD-V-4040-2

Item 100974



**ingun**<sup>®</sup>

Partner for Future Technology

## Vacuum test fixtures

Part no. EN	Designation	Tip version EN
114634	VA 4040/D/H	Vacuum test fixture
114621	VA 4040/D/H/PYLON-12	Vacuum test fixture
114664	VA 4040/D/H/VPC-G12	Vacuum test fixture
114628	VA 4040/F/H	Vacuum test fixture
114641	VA 4040/F/H/GR2270/71	Vacuum test fixture
114657	VA 4040/F/H/GR228x15/07	Vacuum test fixture
114652	VA 4040/F/H/GR228x15/15	Vacuum test fixture
114514	VA 4040/F/H/PYLON-12	Vacuum test fixture
114670	VA 4040/F/H/VPC-G12	Vacuum test fixture
116244	VA 4040/F/H/Z1800	Vacuum test fixture

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 06/26\_GB

Learn more about  
Test fixture kits

