

# Interface block SB-T-HS-034-20A

Item 31011



**ingun**<sup>®</sup>

Partner for Future Technology


- Equipped with INGUN test probes
- Suitable for test fixtures with internal or external Pylon interface
- Consistently low contact resistances and replicable measured values
- High contact reliability and transmission quality
- Reliable transmission of high current signals

## Application

Interface blocks (SB) are used to reliably transmit signals between test device and test system in internal and external Pylon interfaces. High-current blocks are suitable for the reliable transmission of high currents and hazardous voltages within the scope of their specification.



## Signal transmission

The signal is transmitted via two opposing interface blocks, which are designed for a working distance of  $15.1 \pm 0.5$  mm between their mounting surfaces.

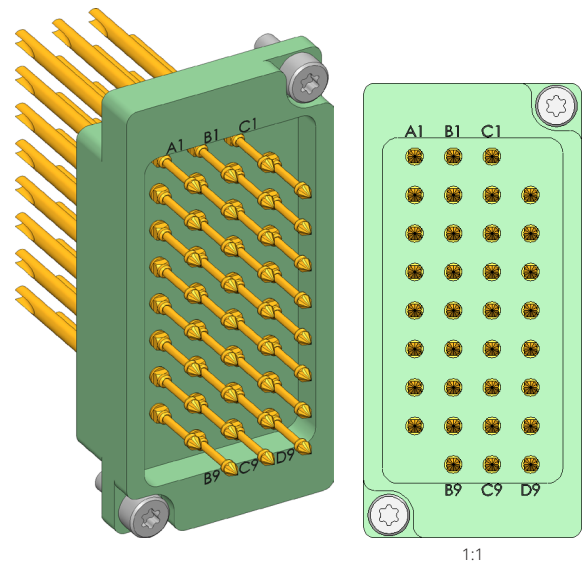

## Delivery

The product is delivered fully assembled including the installation accessories.

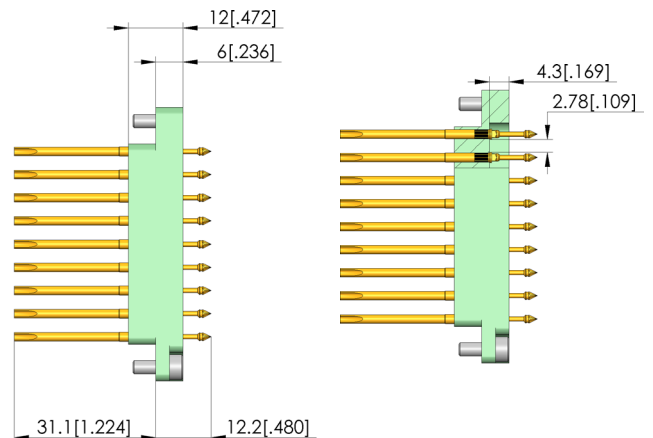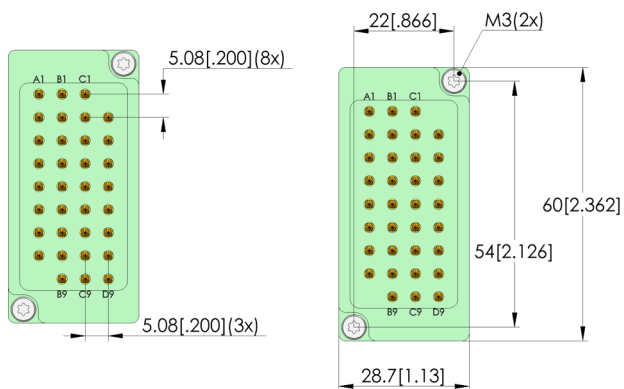

# Interface block

## SB-T-HS-034-20A

Item 31011



GO TO PRODUCT

**ingun**<sup>®</sup>

Partner for Future Technology

### General data

Product group:	Interface blocks (SB)
Series:	SB-HS
Type:	High-current block
Version:	Test system side
Accessory type:	Customising accessories
Component assembly:	HSS-118-0032 & KS-11230M-R
Weight:	0.03 kg [.066 lbs]
Min. temperature:	-30 °C [-22 °F]
Max. temperature:	120 °C [248 °F]
RoHS-compliant:	Yes

### Electrical data

Typical resistance (Ri) of one GKS:	10 mOhm
-------------------------------------	---------

### Compatible with

Compatible mating part 1:	SB-P-HS-034-20A-1,0
Manual test fixtures (MA):	MA 21xx
Pylon receiver:	RC-PYLON-12-V2

### Technical data

Working distance:	15,1 +/- 0,5 mm
Connection:	Solder cup
GKS working stroke :	4 mm [.157 in]
Air distance (not wired):	3 mm [.118 in]
Spring force:	51 N [183 ozf]
Max. current of one GKS:	20 A
Max. current of all GKS:	1.5 A
Max. voltage:	270 V
Max. power loss:	5 W
Min. line cross-section:	0.25 mm <sup>2</sup> [.00038 in <sup>2</sup> ]

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 06/26\_GB