

# Receptacle

## KS-112 30 M-R-Z

Item KS-11230M-R-Z



GO TO PRODUCT

**ingun**<sup>®</sup>

Partner for Future Technology


## Kontaktsteckhülsen

Mit Gewinde zum Einpressen in das Trägermaterial

INGUN SELECTION

### Note:

The receptacle contains an axial bore for leakage testing. This can be closed by soldering on a cable. The receptacle is vacuum-tight after the soldering process. Caution: If handled incorrectly, solder can reach the inner surface of the receptacle.

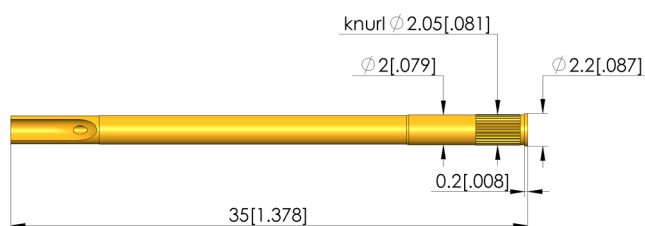

### General data

Product group: Receptacles (KS)  
Series: KS-112  
Sub-series: KS-112 M screw-in version  
Type of receptacle connection: Solder  
Press ring: No  
Surface area: Gold  
Collar diameter: 2.2 mm [.086 in]  
Collar height: 0.2 mm [.007 in]  
Knurl: Yes  
Vacuum-tight: No  
RoHS-compliant: Yes

### Mechanical data

Total length: 35 mm [1.37 in]  
Outer diameter: 2 mm [.078 in]

### Mounting hole

Mounting hole in CEM1: 2 - 2.02 mm [.078 - .079 in]  
Mounting hole in FR4: 2 - 2.02 mm [.078 - .079 in]

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 06/26\_GB

Learn more about  
Test probes

