

Test Probe INGUN E-Type

E-135 270 026 E 2800


Item E-135-0005



GO TO PRODUCT

ingun[®]

Partner for Future Technology

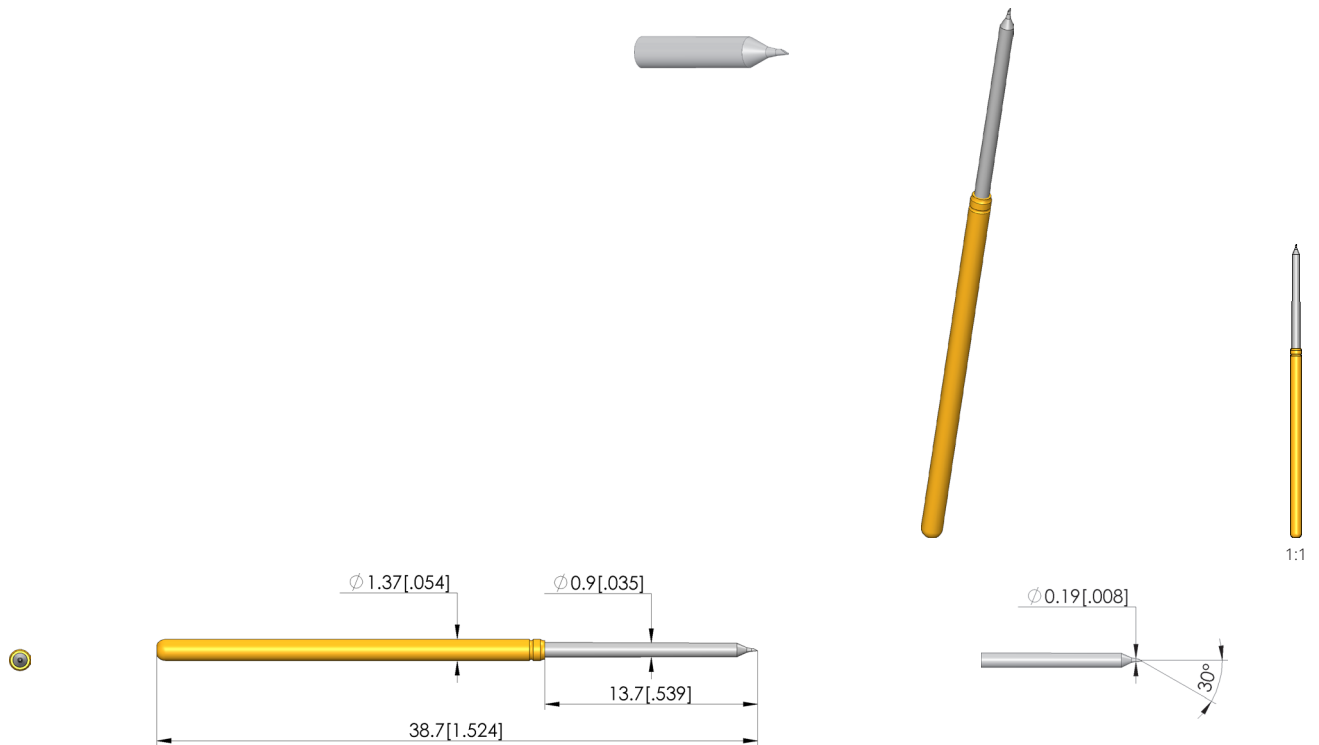

General data

Product group:	ICT / FCT (in-circuit test and function test)
Sub-product group:	INGUN E-TYPE®
Series:	E-135
Grid:	2.54 mm [100 mil]
Contacting from:	Pad
Magnetic:	Yes
Installation type:	Plug-in
Quick-exchange system:	Yes
Adjustable installation height:	No
Non-rotating:	No
Compatible receptacle(s):	KS-100
Min. temperature:	-40 °C [-40 °F]
Max. temperature:	80 °C [176 °F]
RoHS-compliant:	Yes

Tip style data

Tip style:	70 asymmetric slanted needle tip
Tip diameter:	0.2 mm [.007 in]
Tip style surface:	E palladium / nickel
Tip style material:	2 steel

Electrical data

Current load capacity / rated current:	5 A
Typical resistance (Ri):	30 mOhm

Mechanical data

Total length:	38.7 mm [1.52 in]
Barrel diameter:	1.37 mm [.053 in]
Maximum stroke:	11.5 mm [.452 in]
Spring pre-load:	0.78 N [2.8 ozf]
Collar height:	00
Spring force at working stroke:	2.8 N [10 ozf]
Recommended working stroke:	9.3 mm [.366 in]

Test Probe INGUN E-Type

E-135 270 026 E 2800


Item E-135-0005



GO TO PRODUCT

ingun[®]

Partner for Future Technology

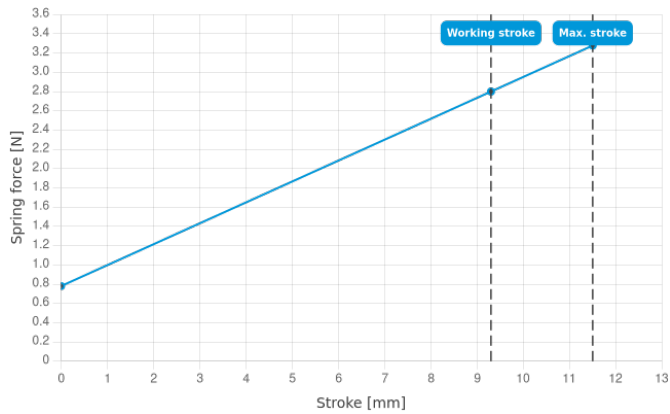

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 05/26_GB

Learn more about
ICT/FCT Test probes



ICT/FCT TEST PROBES

ingun.com