





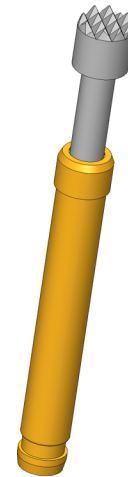


GO TO PRODUCT

- Robust test probes with distinctive collar (stop) on the barrel
- Optimum adjustment of the stroke ratios in the test fixture: The collar is available in different heights, which, in combination with the receptacles, allows a range of installation heights
- Stainless steel versions for temperatures from -100 °C up to +200 °C available



1:1

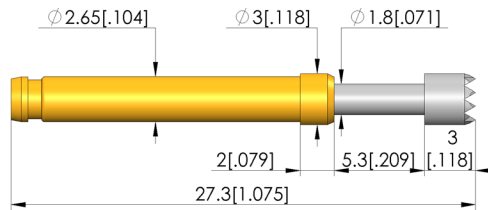

General data

Product group: ICT / FCT (in-circuit test and function test)
 Sub-product group: Metric standard
 Series: GKS-113
 Grid: 4 mm [157 mil]
 Contacting from: Post
 Magnetic: Yes
 Installation type: Plug-in
 Quick-exchange system: Yes
 Adjustable installation height: No
 Non-rotating: No
 Compatible receptacle(s): KS-113
 Min. temperature: -40 °C [-40 °F]
 Max. temperature: 80 °C [176 °F]
 RoHS-compliant: Yes

ICT / FCT (in-circuit test and function test)
 Metric standard
 GKS-113
 4 mm [157 mil]
 Post
 Yes
 Plug-in
 Yes
 No
 No
 KS-113
 -40 °C [-40 °F]
 80 °C [176 °F]
 Yes

Tip style data

Tip style: 06 serrated
 Tip diameter: 3 mm [.118 in]
 Tip style surface: R rhodium
 Tip style material: 3 CuBe

Electrical data

Current load capacity / rated current: 8 A
 Typical resistance (Ri): 30 mOhm

Mechanical data

Total length: 27.3 mm [1.07 in]
 Barrel diameter: 2.65 mm [.104 in]
 Maximum stroke: 5.3 mm [.208 in]
 Spring pre-load: 0.5 N [1.79 ozf]
 Collar height: 02
 Spring force at working stroke: 1.5 N [5.39 ozf]
 Recommended working stroke: 4 mm [.157 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
 78467, Constance, Germany
 Phone +49 7531 8105-0
 Customer hotline +49 7531 8105-888
 Fax +49 7531 8105-65
 info@ingun.com



Learn more about
 ICT/FCT Test probes

