




GO TO PRODUCT

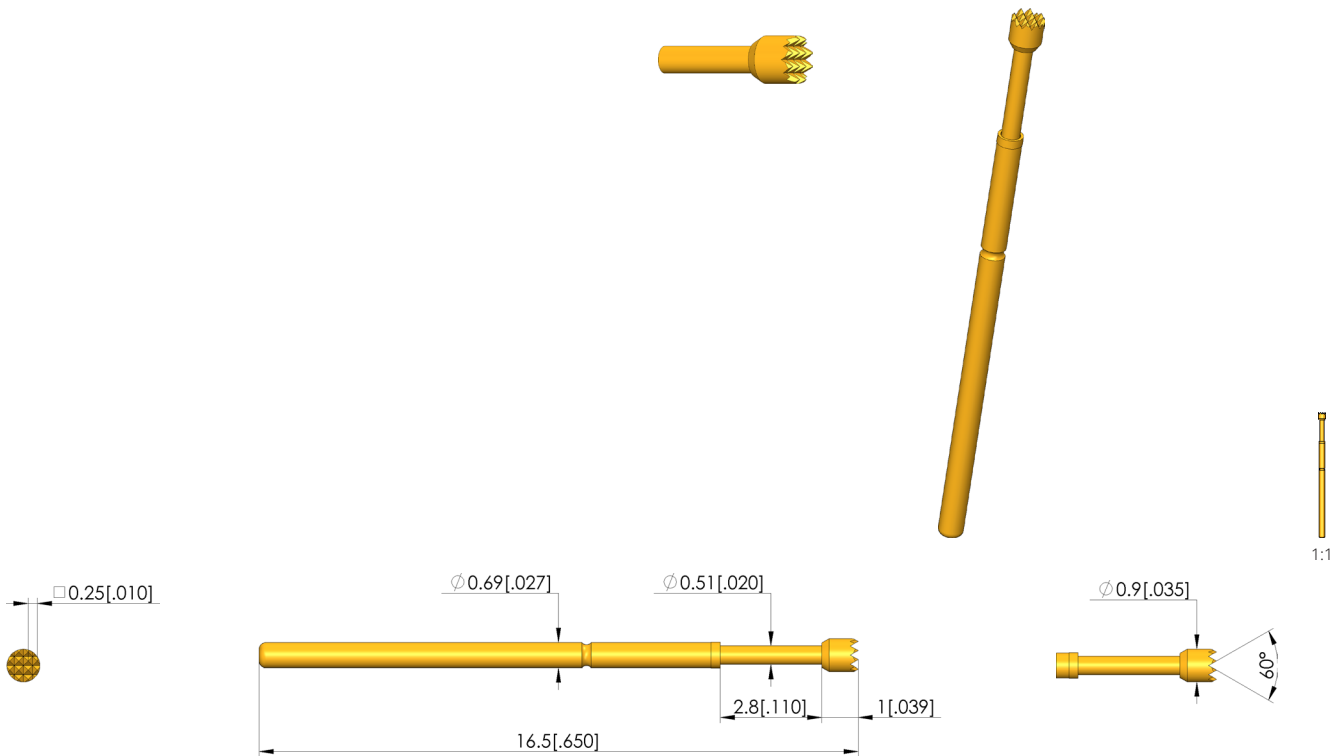

General data

Product group:
 Sub-product group:
 Series:
 Grid:
 Contacting from:
 Magnetic:
 Installation type:
 Quick-exchange system:
 Adjustable installation height:
 Non-rotating:
 Compatible receptacle(s):
 Min. temperature:
 Max. temperature:
 RoHS-compliant:

ICT / FCT (in-circuit test and function test)
 Fine-pitch
 GKS-069
 1.27 mm [50 mil]
 Post
 Yes
 Plug-in
 Yes
 No
 No
 KS-069
 -40 °C [-40 °F]
 80 °C [176 °F]
 Yes

Tip style data

Tip style:
 Tip diameter:
 Tip style surface:
 Tip style material:

06 serrated
 0.9 mm [.035 in]
 A gold
 3 CuBe

Electrical data

Current load capacity / rated current:
 Typical resistance (Ri):

3 A
 20 mOhm

Mechanical data

Total length:
 Barrel diameter:
 Maximum stroke:
 Spring pre-load:
 Collar height:
 Spring force at working stroke:
 Recommended working stroke:

16.5 mm [.649 in]
 0.69 mm [.027 in]
 2.8 mm [.11 in]
 0.29 N [1.04 ozf]
 00
 1 N [3.59 ozf]
 2.2 mm [.086 in]

Test Probe

GKS-069 306 090 A 1000


Item GKS-069-0031



GO TO PRODUCT

ingun®

Partner for Future Technology

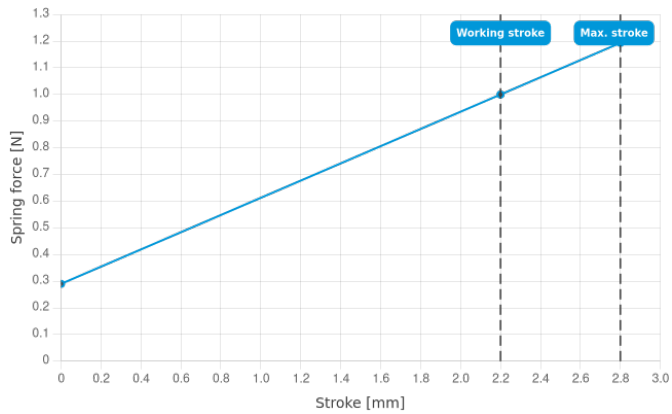

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 05/26_GB

Learn more about
ICT/FCT Test probes



ICT/FCT TEST PROBES

ingun.com