

Receptacle KS-112 47 G8


Item KS-11247G8




GO TO PRODUCT

ingun[®]

Partner for Future Technology



1:1

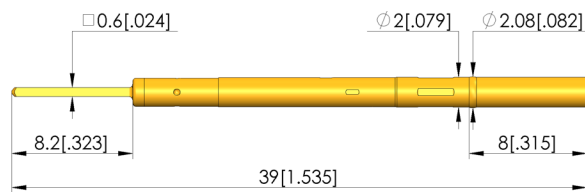

General data

Product group: Receptacles (KS)
Series: KS-112
Sub-series: KS-112 press-in version
Type of receptacle connection: Wire-wrap
Press ring: Yes
Surface area: Gold
Collar diameter: 2.08 mm [.081 in]
Collar height: 8 mm [.314 in]
Wire-wrap post length: 8.2 mm [.322 in]
Knurl: No
Vacuum-tight: yes (< 1 ccm / min)
RoHS-compliant: Yes

Mechanical data

Total length: 39 mm [1.53 in]
Outer diameter: 2 mm [.078 in]

Mounting hole

Mounting hole in CEM1: 1.98 - 2 mm [.077 - .078 in]
Mounting hole in FR4: 1.99 - 2.01 mm [.078 - .079 in]
Mounting hole with press ring in CEM1: 2.03 - 2.05 mm [.079 - .08 in]
Mounting hole with press ring in FR4: 2.03 - 2.05 mm [.079 - .08 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 06/26_GB

Learn more about
Test probes

