

Button activator TAB-M-10-6-LK

Item 57584



GO TO PRODUCT

ingun[®]

Partner for Future Technology



- Reliable actuation of push-buttons and spring-loaded switches
- Quick, easy, space-saving installation
- Freely-adjustable positioning thanks to the threaded connection
- Not air-tight

Application

Button activators (TAB) can be used for space-saving actuation of push-buttons and spring-loaded switches on the PCB during testing. They are actuated manually.

Delivery

Delivered partially assembled, tip is enclosed .

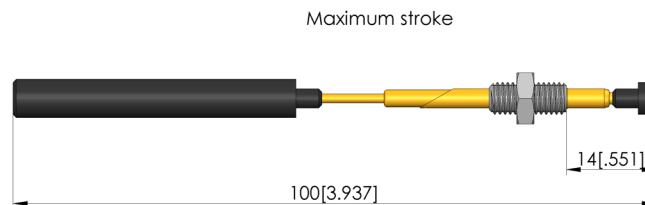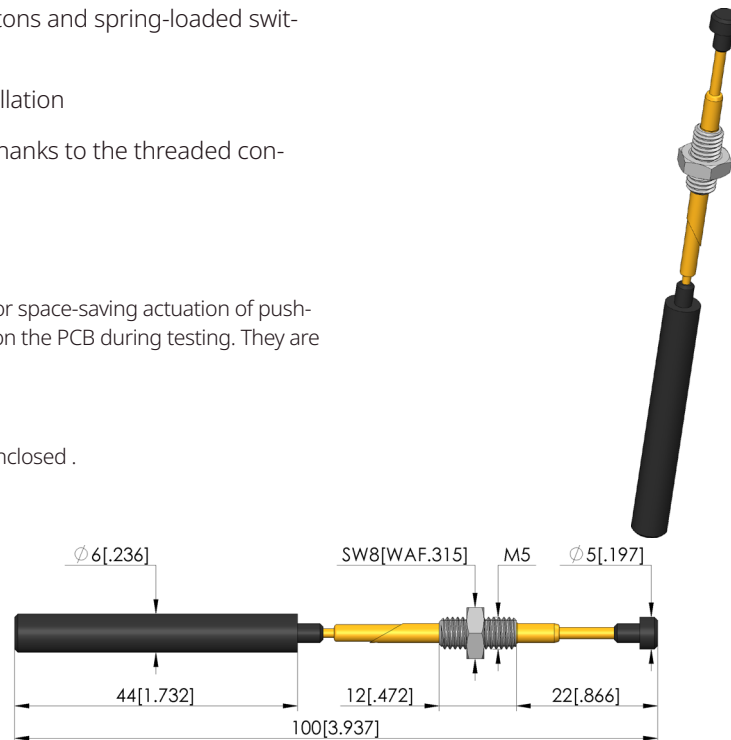

General data

Product group:	Button activator
Series:	TAB
Type:	Button actuator (TAB), manual
Version:	100 long
Accessory type:	Customising accessories
Scope of delivery:	Partially assembled, tip enclosed
Width:	9.5 mm [.374 in]
Weight:	0.01 kg [.022 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

Compatible with

Exchangeable kits version:	No RF
Manual test fixtures (MA):	MA 2012
MA exchangeable kits (ATS MA):	ATS MAxx
PA exchangeable kits (ATS PA):	ATS PAZxxx
For dual-stage contacting:	Yes

Technical data

Stroke:	8 mm [.314 in]
Tip diameter:	6 mm [.236 in]
Installation:	Thread M5
Installation grid:	10 mm [.393 in]
Length:	100 mm [3.93 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 06/26_GB