

# Electric LED analyser ELA-20-FEASA-I-OH3

Item 33684



GO TO PRODUCT

**ingun**<sup>®</sup>

Partner for Future Technology




- FEASA(TM) LED analyser
- Testing of several LEDs simultaneously for colour and brightness

## Application

The FEASA(TM) LED Analyser is used to test several LEDs simultaneously for colour and brightness. The speed of the test depends on the intensity of the LEDs being tested, i.e. bright LEDs have a shorter test time, while weaker LEDs have a longer test time.

## Interface

Connection via the serial RS232 interface requires an additional power supply.

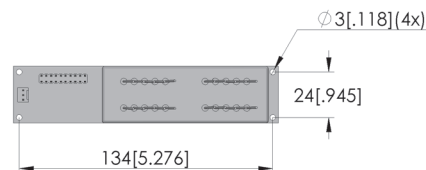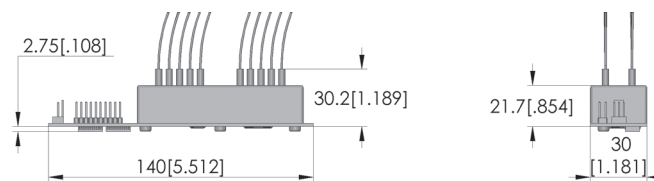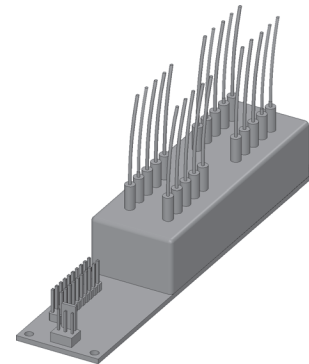

## General data

Product group:	Electric accessory
Series:	ELA
Type:	Feasa-I (without housing)
Version:	Incl. 20x OH-3
Accessory type:	Customising accessories
Width:	30 mm [1.18 in]
Height:	33 mm [1.29 in]
Weight:	0.06 kg [0.132 lbs]
Min. temperature:	0 °C [32 °F]
Max. temperature:	50 °C [122 °F]
RoHS-compliant:	Yes

## Compatible with

Manual test fixtures (MA):	MA 2012
Vacuum test fixtures (VA):	VA 3070
MA exchangeable kits (ATS MA):	ATS MAxx
PA exchangeable kits (ATS PA):	ATS PAZxxx

## Technical data

Connection:	RS232
Max. current:	0.2 A
Max. voltage:	5,0 V
Number of poles:	20
Length:	140 mm [5.51 in]
Cable length:	600 mm [23.6 in]
Fibre optic cladding diameter:	1 mm [0.039 in]
Outer dimensionS (WxDxH):	140 x 30 x 33 mm [5.51 x 1.18 x 1.29 in]

## INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 06/26\_GB