

Receptacle

KS-899 30 M-R

Item KS-89930M-R



GO TO PRODUCT

ingun[®]

Partner for Future Technology



Kontaktsteckhülsen

Mit Gewinde zum Einpressen in das Trägermaterial

INGUN SELECTION

Note:

The receptacle contains an axial bore for leakage testing. This can be closed by soldering on a cable. The receptacle is vacuum-tight after the soldering process. Caution: If handled incorrectly, solder can reach the inner surface of the receptacle.

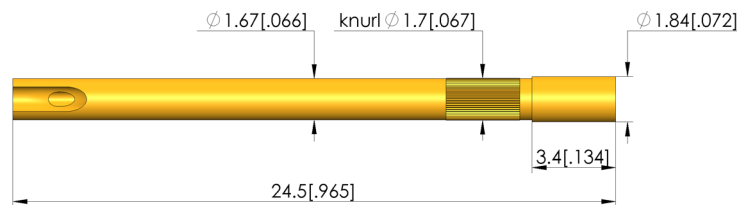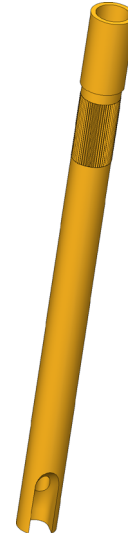

General data

Product group: Receptacles (KS)
Series: KS-899
Sub-series: KS-899 M screw-in version
Type of receptacle connection: Solder
Press ring: No
Surface area: Gold
Collar diameter: 1.84 mm [.072 in]
Collar height: 3.4 mm [.133 in]
Knurl: Yes
Vacuum-tight: No
RoHS-compliant: Yes

Mechanical data

Total length: 24.5 mm [.964 in]
Outer diameter: 1.67 mm [.065 in]

Mounting hole

Mounting hole in CEM1: 1.67 - 1.68 mm [.065 - .066 in]
Mounting hole in FR4: 1.67 - 1.68 mm [.065 - .066 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 06/26_GB

Learn more about
Test probes

