




GO TO PRODUCT

- Quick, tool-free set-up, can be used without readjustment
- Available in standard and ESD versions, without internal interface
- Signal transmission using VG multipoint connectors for individual configurations

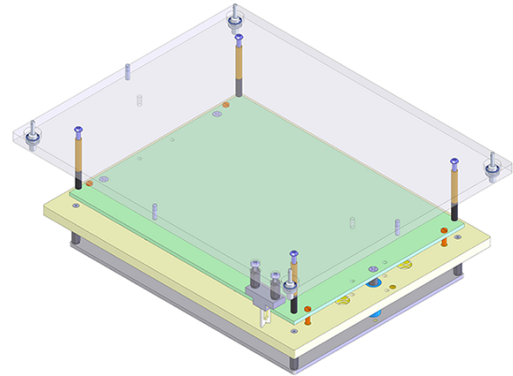

### General data

Product group:	ATS pneumatic test fixture (PA)
Subseries:	ATS PAxxxx
Series:	ATS PA2130
Version:	With interface
Scope of delivery:	Assembled
For tandem fixtures:	No
Max. interface signals:	350
Interface blocks required:	No
Internal interface:	Not available
Dual-stage contacting:	No
Double-sided contact:	Yes, with compatible additional option
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
Low voltage:	No
RoHS-compliant:	Yes

### Compatible with

Pneumatic test fixtures (PA):	PA 2130
-------------------------------	---------

### Technical data

Pushrod length:	51 mm [2 in]
Test probe installation height, bottom:	10.5 mm [.413 in]
Free space above PCB:	49 mm [1.92 in]
Permissible test voltage:	25 VAC / 60 VAC
Compressed air supply:	4 – 6 bar [58 – 87 psi]
Useable area (WxD):	250 x 200 mm [9.84 x 7.87 in]
Outer dimensionS (WxDxH):	358 x 288 x 142 mm [14 x 11.3 x 5.59 in]

Exchangeable kit

## ATS PA2130


Item 21117



GO TO PRODUCT

**ingun**<sup>®</sup>

Partner for Future Technology

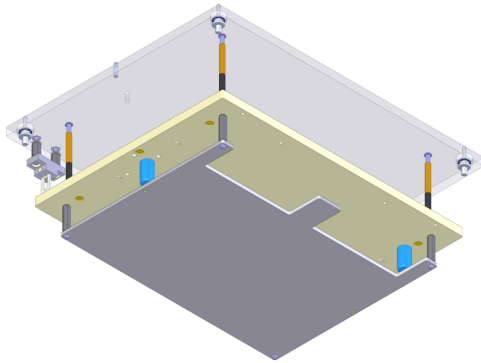

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 05/26\_GB

Learn more about  
Test fixture kits

