

Prüfsteckeraufnahme Set Federelement 2x5N

Item 112863




GO TO PRODUCT

ingun[®]

Partner for Future Technology

- Precise, low-wear contacting
- Outstanding service life
- Reliable data transmission
- Installation via floating mount required
- Signal transmission to the test system via original connector plug or solder connection

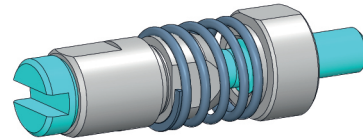

General data



Product group:
Series:
Weight:
Min. temperature:
Max. temperature:
RoHS-compliant:
REACH-compliant:

Test plug
PS
0.01 kg [.022 lbs]
-40 °C [-40 °F]
80 °C [176 °F]
Yes
No SVHC

Technical data

Stroke:
Spring force:
Diameter:

2 mm [.078 in]
5 N [17.9 ozf]
7.5 mm [.295 in]

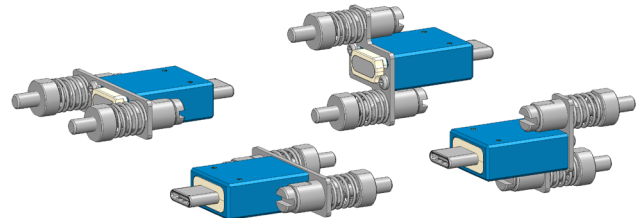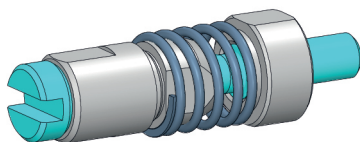

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 05/26_GB