

Test Probe

GKS-001 303 150 A 1500

Item GKS-001-0017






GO TO PRODUCT

ingun[®]

Partner for Future Technology

- Robust, compact design for harsh ICT/FCT applications with limited space
- For optimum contact at the test points (e.g. pads, vias, and pins), various tip styles in different diameters and finishes, as well as various spring forces are available. Spring forces.

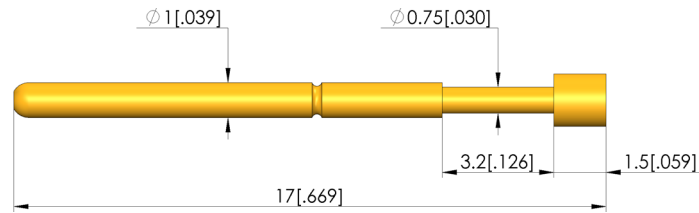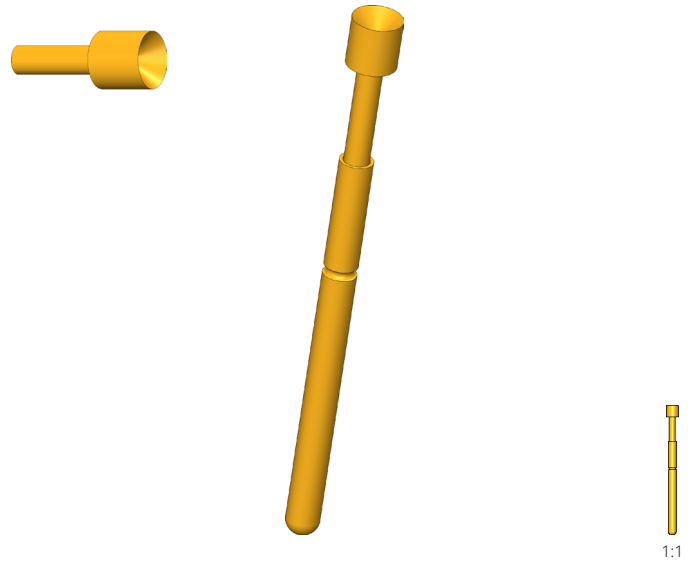

General data

Product group:	ICT / FCT (in-circuit test and function test)
Sub-product group:	Short/robust GKS
Series:	GKS-001
Grid:	1.91 mm [75.1 mil]
Contacting from:	Post
Magnetic:	Yes
Installation type:	Plug-in
Quick-exchange system:	Yes
Adjustable installation height:	No
Non-rotating:	No
Compatible receptacle(s):	KS-001
Min. temperature:	-40 °C [-40 °F]
Max. temperature:	80 °C [176 °F]
RoHS-compliant:	Yes

Tip style data

Tip style:	03 inverse cone
Tip diameter:	1.5 mm [.059 in]
Tip style surface:	A gold
Tip style material:	3 CuBe

Electrical data

Current load capacity / rated current:	4 A
Typical resistance (Ri):	20 mOhm

Mechanical data

Total length:	17 mm [.669 in]
Barrel diameter:	1 mm [.039 in]
Maximum stroke:	3 mm [.118 in]
Spring pre-load:	0.47 N [1.69 ozf]
Collar height:	00
Spring force at working stroke:	1.5 N [5.39 ozf]
Recommended working stroke:	2.4 mm [.094 in]

Test Probe

GKS-001 303 150 A 1500


Item GKS-001-0017



GO TO PRODUCT

ingun®

Partner for Future Technology

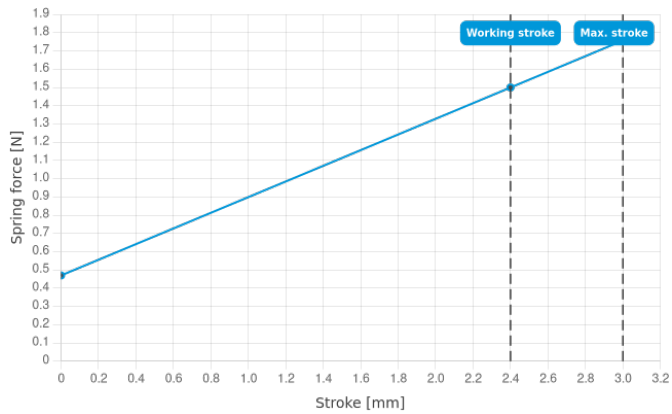

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 05/26_GB

Learn more about
ICT/FCT Test probes



ingun.com

ICT/FCT TEST PROBES