




GO TO PRODUCT

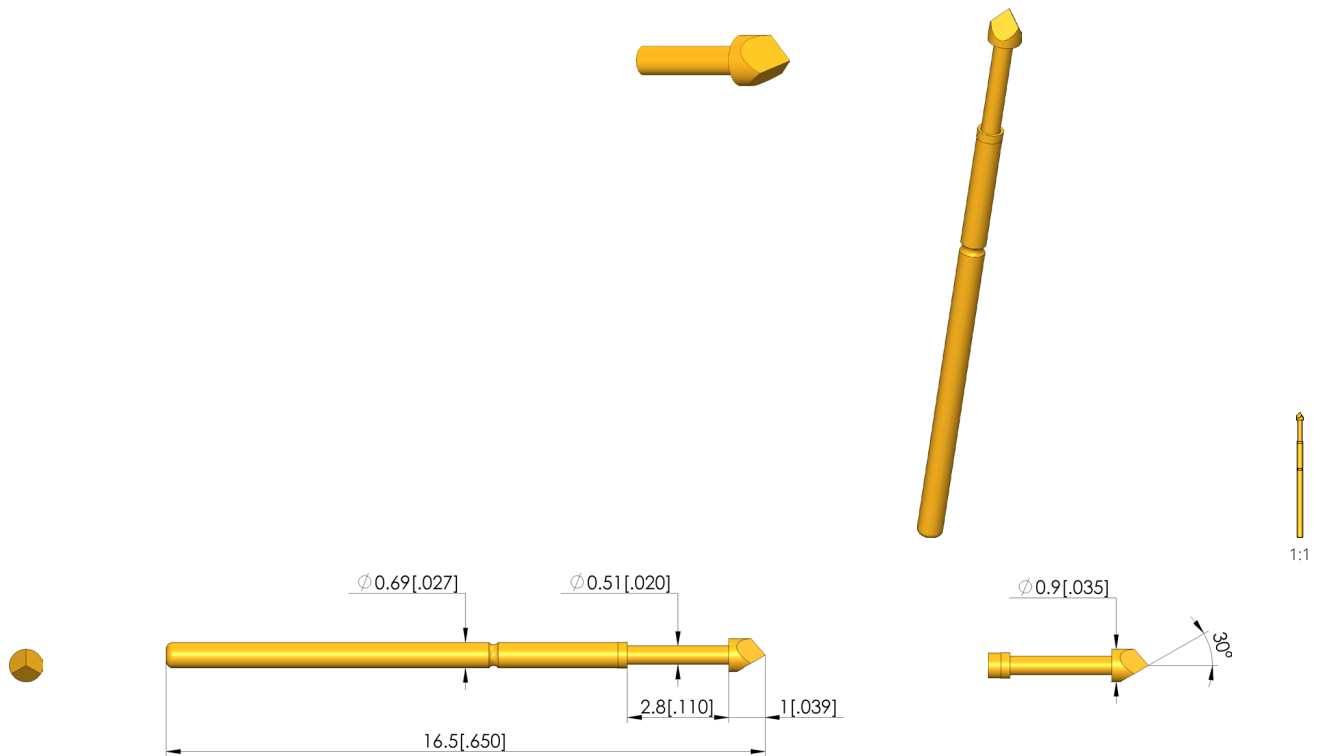

**General data**

Product group: ICT / FCT (in-circuit test and function test)  
 Sub-product group: Fine-pitch  
 Series: GKS-069  
 Grid: 1.27 mm [50 mil]  
 Contacting from: Via  
 Magnetic: Yes  
 Installation type: Plug-in  
 Quick-exchange system: Yes  
 Adjustable installation height: No  
 Non-rotating: No  
 Compatible receptacle(s): KS-069  
 Min. temperature: -40 °C [-40 °F]  
 Max. temperature: 80 °C [176 °F]  
 RoHS-compliant: Yes

Product group: ICT / FCT (in-circuit test and function test)  
 Sub-product group: Fine-pitch  
 Series: GKS-069  
 Grid: 1.27 mm [50 mil]  
 Contacting from: Via  
 Magnetic: Yes  
 Installation type: Plug-in  
 Quick-exchange system: Yes  
 Adjustable installation height: No  
 Non-rotating: No  
 Compatible receptacle(s): KS-069  
 Min. temperature: -40 °C [-40 °F]  
 Max. temperature: 80 °C [176 °F]  
 RoHS-compliant: Yes

**Tip style data**

Tip style: 07 90° 3-edged chisel, self-cleaning  
 Tip diameter: 0.9 mm [.035 in]  
 Tip style surface: A gold  
 Tip style material: 3 CuBe

**Electrical data**

Current load capacity / rated current: 3 A  
 Typical resistance (Ri): 20 mOhm

**Mechanical data**

Total length: 16.5 mm [.649 in]  
 Barrel diameter: 0.69 mm [.027 in]  
 Maximum stroke: 2.8 mm [.11 in]  
 Spring pre-load: 0.29 N [1.04 ozf]  
 Collar height: 00  
 Spring force at working stroke: 1 N [3.59 ozf]  
 Recommended working stroke: 2.2 mm [.086 in]

# Test Probe

## GKS-069 307 090 A 1000


Item GKS-069-0034



GO TO PRODUCT

# ingun®

Partner for Future Technology

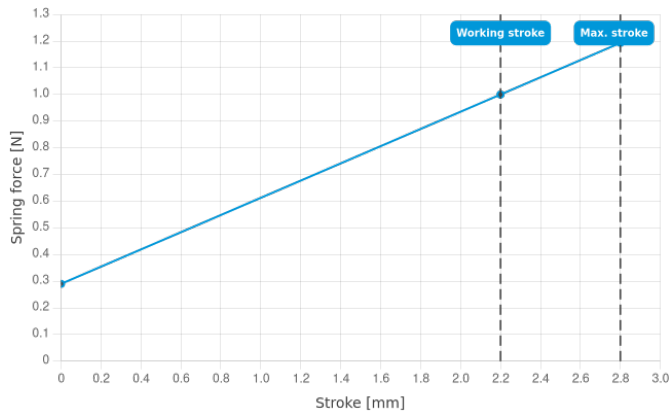

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 05/26\_GB

Learn more about  
ICT/FCT Test probes



ingun.com

ICT/FCT TEST PROBES