




GO TO PRODUCT

- Quick, tool-free set-up, can be used without readjustment
- Available in standard and ESD versions, with or without internal interface
- Signal transmission using VG multipoint connectors or contact terminals for individual configurations

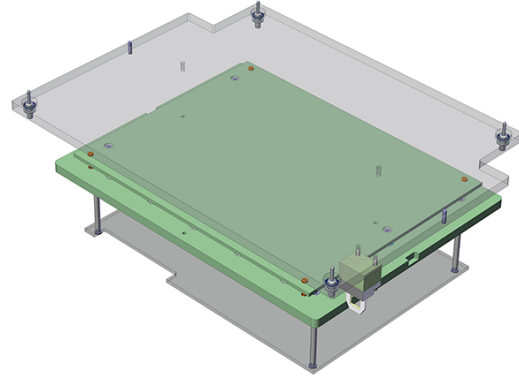

General data

Product group:	ATS pneumatic test fixture (PA)
Subseries:	ATS PAZxxx
Series:	ATS PAZ215
Version:	With interface
Scope of delivery:	Assembled
For tandem fixtures:	No
Max. interface signals:	768
Interface blocks required:	No
Max. internal interface blocks:	0
Internal interface:	Available
Dual-stage contacting:	No
Double-sided contact:	No
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
Low voltage:	No
RoHS-compliant:	Yes

Compatible with

Pneumatic test fixtures (PA):	PAZ 215
-------------------------------	---------

Technical data

Pushrod length:	36.4 mm [1.43 in]
Test probe installation height, bottom:	10.5 mm [.413 in]
Free space above PCB:	36 mm [1.41 in]
Permissible test voltage:	25 VAC / 60 VDC
Compressed air supply:	4 – 6 bar [58 – 87 psi]
Useable area (WxD):	260 x 200 mm [10.2 x 7.87 in]
Outer dimensionS (WxDxH):	438 x 318 x 187 mm [17.2 x 12.5 x 7.36 in]

Exchangeable kit

ATS PAZ215


Item 18958



GO TO PRODUCT

ingun[®]

Partner for Future Technology

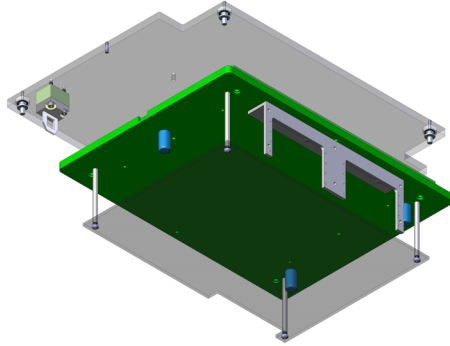

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 05/26_GB

Learn more about
Test fixture kits

