

Bottom interchangeable kit WSU SPEA/3030/IL-OL/FR4

Item 54990




GO TO PRODUCT

ingun[®]

Partner for Future Technology

- Trusted interchangeable kits for SPEA inline test systems
- Precise, reliable contacting with peRFectly configured guides
- Modular design with bottom interchangeable kit (WSU) and top interchangeable kit (WSO)
- Robust, durable design with outstanding service life

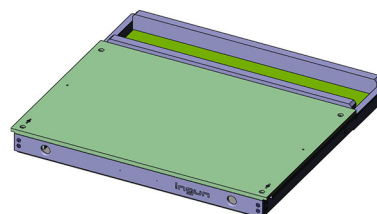

General data

Product group:	Inline interchangeable kit (WS)
Subseries:	SPEA 3030
Series:	WS SPEA-3030
Version:	With interface, FR4
Scope of delivery:	Assembled
Internal interface:	Available unpopulated
Double-sided contact:	Yes
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]

Technical data

Pushrod length:	96.2 mm [3.78 in]
Test probe installation height, top:	16 mm [.629 in]
Test probe installation height, bottom:	13 mm [.511 in]
Test probe installation height, dual-stage, bottom:	18.3 mm [.72 in]
Free space above PCB:	12 mm [.472 in]
Useable area (WxD):	500 x 300 mm [19.6 x 11.8 in]
Outer dimensionS (WxDxH):	620 x 560 x 66 mm [24.4 x 22 x 2.59 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 05/26_GB

Learn more about
Inline interchangeable kit



INLINE INTERCHANGEABLE KITS

ingun.com