


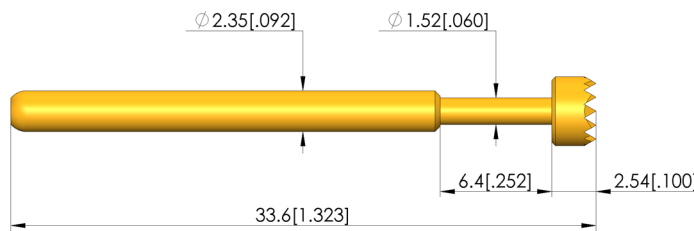




GO TO PRODUCT

- Robust, compact design for harsh ICT/FCT applications with limited space
- For optimum contact at the test points (e.g. pads, vias, and pins), various tip styles in different diameters and finishes, as well as various spring forces are available. Spring forces.

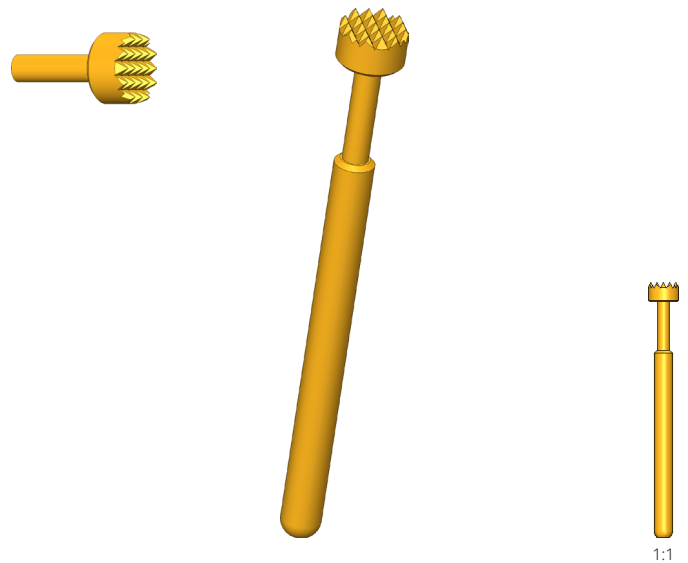

General data

Product group:
 Sub-product group:
 Series:
 Grid:
 Contacting from:
 Magnetic:
 Installation type:
 Quick-exchange system:
 Adjustable installation height:
 Non-rotating:
 Compatible receptacle(s):
 Min. temperature:
 Max. temperature:
 RoHS-compliant:

ICT / FCT (in-circuit test and function test)
 Short/robust GKS
 GKS-004
 4.75 mm [187 mil]
 Post
 Yes
 Plug-in
 Yes
 No
 No
 KS-004
 -40 °C [-40 °F]
 80 °C [176 °F]
 Yes

Tip style data

Tip style:
 Tip diameter:
 Tip style surface:
 Tip style material:

06 serrated
 3.96 mm [.155 in]
 A gold
 2 steel

Electrical data

Current load capacity / rated current:
 Typical resistance (Ri):

6 A
 20 mOhm

Mechanical data

Total length:
 Barrel diameter:
 Maximum stroke:
 Spring pre-load:
 Collar height:
 Spring force at working stroke:
 Recommended working stroke:

33.6 mm [1.32 in]
 2.36 mm [.092 in]
 6.35 mm [.25 in]
 1.02 N [3.66 ozf]
 00
 2 N [7.19 ozf]
 4.4 mm [.173 in]

Test Probe


GKS-004 206 396 A 2000

Item GKS-004-0005



ingun[®]

Partner for Future Technology

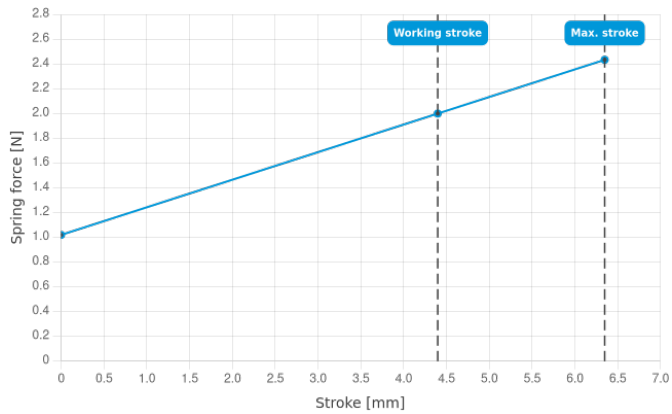

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 07/26_GB

Learn more about
ICT/FCT Test probes



ingun.com