

# Vacuum seal

## VD-R-03-XXXX

Item 5107



GO TO PRODUCT



**ingun**<sup>®</sup>

Partner for Future Technology

- Outstanding service life
- Wartungsarm
- Zuverlässige Abdichtung, für stabile, reproduzierbare Kontaktierungen

### Application

Vakuumdichtungen werden in Vakuum-Prüfadaptoren verwendet, um ein prozessstabiles Vakuum zu erzeugen, zur Durchführung zuverlässiger Tests (ICT/FCT) an elektronischen Leiterplatten.

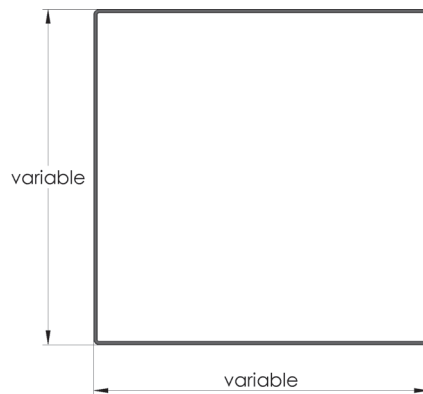

### General data

Product group:  
Series:  
Type:  
Version:  
Accessory type:  
Scope of delivery:  
Material:  
Colour:  
Weight:  
Min. temperature:  
Max. temperature:  
RoHS-compliant:

Spare part kits  
VD-VAxxxx  
Round seal  
Variable outer dimension  
Spare parts  
Unassembled  
EPDM rubber  
Black  
0.01 kg [0.022 lbs]  
10 °C [50 °F]  
60 °C [140 °F]  
Yes

### Compatible with

Accessories:

VKH

### Technical data

Diameter:

3 mm [0.118 in]

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 06/26\_GB

Learn more about  
Test fixture kits

