




GO TO PRODUCT

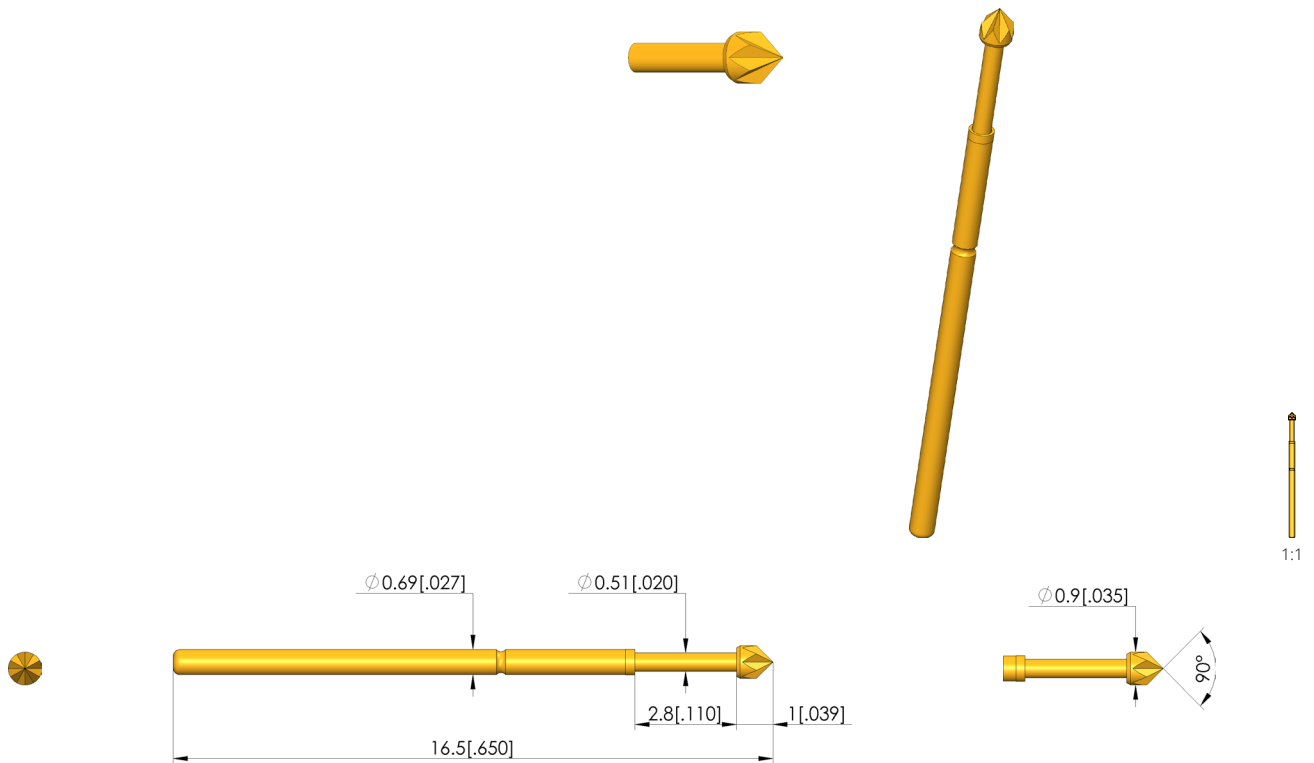

**General data**

Product group:	ICT / FCT (in-circuit test and function test
Sub-product group:	Fine-pitch
Series:	GKS-069
Grid:	1.27 mm [50 mil]
Contacting from:	Via
Magnetic:	Yes
Installation type:	Plug-in
Quick-exchange system:	Yes
Adjustable installation height:	No
Non-rotating:	No
Compatible receptacle(s):	KS-069
Min. temperature:	-40 °C [-40 °F]
Max. temperature:	80 °C [176 °F]
RoHS-compliant:	Yes

**Tip style data**

Tip style:	17 hexagonal pyramid with cutting edges, self-cleaning
Tip diameter:	0.9 mm [.035 in]
Tip style surface:	A gold
Tip style material:	2 steel

**Electrical data**

Current load capacity / rated current:	3 A
Typical resistance (Ri):	20 mOhm

**Mechanical data**

Total length:	16.5 mm [.649 in]
Barrel diameter:	0.69 mm [.027 in]
Maximum stroke:	2.8 mm [.11 in]
Spring pre-load:	0.29 N [1.04 ozf]
Collar height:	00
Spring force at working stroke:	1 N [3.59 ozf]
Recommended working stroke:	2.2 mm [.086 in]

# Test Probe


## GKS-069 217 090 A 1000

Item GKS-069-0038



**ingun**<sup>®</sup>

Partner for Future Technology

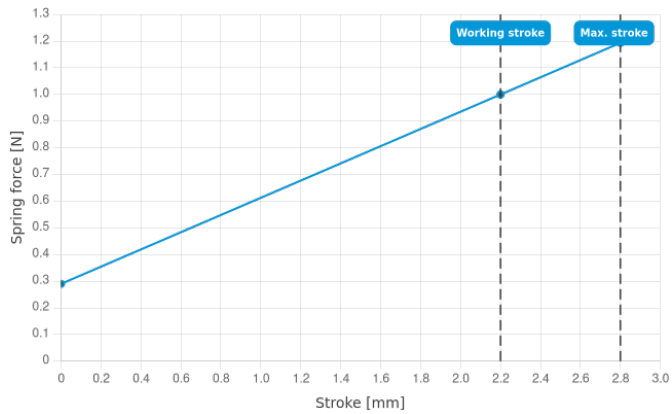

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 05/26\_GB

Learn more about  
ICT/FCT Test probes



ingun.com