

# Receptacle

## KS-112 30 G8


Item KS-11230G8




GO TO PRODUCT

**ingun**<sup>®</sup>

Partner for Future Technology



1:1

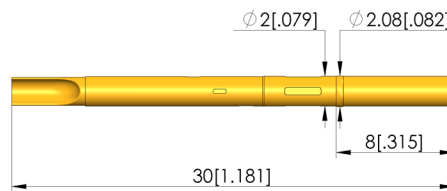

### General data

Product group:  
Series:  
Sub-series:  
Type of receptacle connection:  
Press ring:  
Surface area:  
Collar diameter:  
Collar height:  
Knurl:  
Vacuum-tight:  
RoHS-compliant:

Receptacles (KS)  
KS-112  
KS-112 press-in version  
Solder  
Yes  
Gold  
2.08 mm [.081 in]  
8 mm [.314 in]  
No  
No  
Yes

### Mechanical data

Total length: 30 mm [1.18 in]  
Outer diameter: 2 mm [.078 in]

### Mounting hole

Mounting hole in CEM1: 1.98 - 2 mm [.077 - .078 in]  
Mounting hole in FR4: 1.99 - 2.01 mm [.078 - .079 in]  
Mounting hole with press ring in CEM1: 2.03 - 2.05 mm [.079 - .08 in]  
Mounting hole with press ring in FR4: 2.03 - 2.05 mm [.079 - .08 in]

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 06/26\_GB

Learn more about  
Test probes

