

High-current test probe

HSS-150 306 400 A 3002

Item HSS-150-0001







GO TO PRODUCT

ingun[®]

Partner for Future Technology

- Trusted, robust high-current probes, optimally sized for current load capacity ratio
- Low-resistance contact probe with Ri typical < 10 mΩ
- For use in function and burn-in tests
- Large selection of tip styles and spring forces for optimum contact with DUT
- Optimum adjustment of the stroke ratios in the test fixture: The test probe collar is available in different heights, which, in combination with the receptacles, allows a range of installation heights

INGUN SELECTION

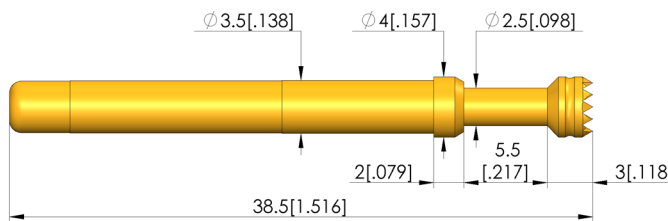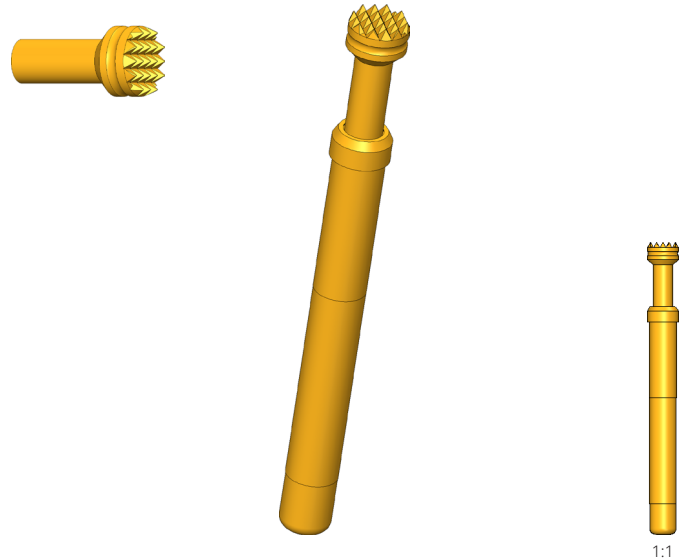

General data

Product group: Standard HSS (press-in)
 Sub-product group: Standard HSS (press-in)
 Series: HSS-150
 Grid: 5.08 mm [200 mil]
 Contacting from: Post
 Magnetic: Yes
 Installation type: Plug-in
 Quick-exchange system: Yes
 Adjustable installation height: No
 Non-rotating: No
 Compatible receptacle(s): KS-150
 Min. temperature: -100 °C [-148 °F]
 Max. temperature: 200 °C [392 °F]
 RoHS-compliant: Yes

Standard HSS (press-in)
 Standard HSS (press-in)
 HSS-150
 5.08 mm [200 mil]
 Post
 Yes
 Plug-in
 Yes
 No
 No
 KS-150
 -100 °C [-148 °F]
 200 °C [392 °F]
 Yes

Tip style data

Tip style: 06 serrated
 Tip diameter: 4 mm [.157 in]
 Tip style surface: A gold
 Tip style material: 3 CuBe

06 serrated
 4 mm [.157 in]
 A gold
 3 CuBe

Electrical data

Current load capacity / rated current: 50 A
 Typical resistance (Ri): 10 mOhm

50 A
 10 mOhm

Mechanical data

Total length: 38.5 mm [1.51 in]
 Barrel diameter: 3.5 mm [.137 in]
 Maximum stroke: 5.5 mm [.216 in]
 Spring pre-load: 1.31 N [4.71 ozf]
 Collar height: 02
 Spring force at working stroke: 3 N [10.7 ozf]
 Recommended working stroke: 4.4 mm [.173 in]

38.5 mm [1.51 in]
 3.5 mm [.137 in]
 5.5 mm [.216 in]
 1.31 N [4.71 ozf]
 02
 3 N [10.7 ozf]
 4.4 mm [.173 in]

High-current test probe HSS-150 306 400 A 3002

Item HSS-150-0001




GO TO PRODUCT


ingun[®]

Partner for Future Technology

Current Derating

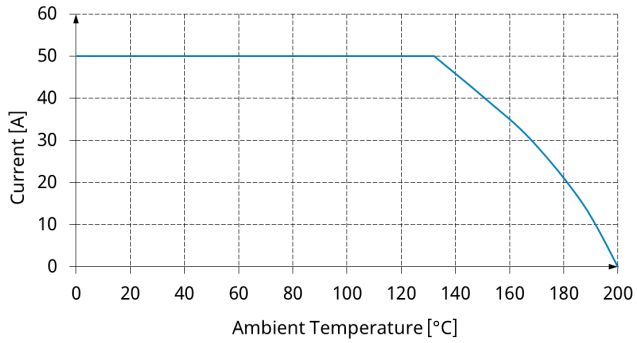

Current Rating

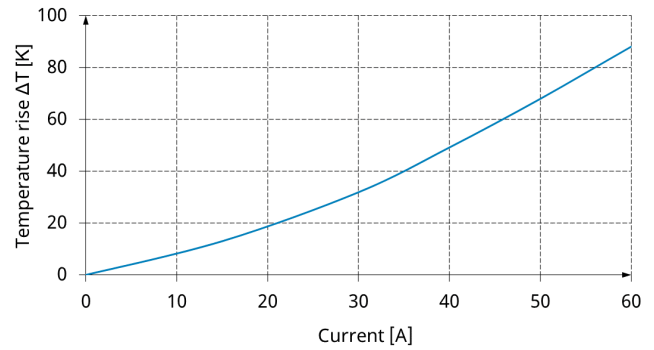

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 06/26_GB

Learn more about
High-current test probes



ingun.com