

# Receptacle

## KS-215 M1.6-F-R

Item KS-215M1.6-F-R



GO TO PRODUCT



# ingun®

Partner for Future Technology

## Kontaktsteckhülsen

Mit Gewinde zum Einpressen in das Trägermaterial

INGUN SELECTION

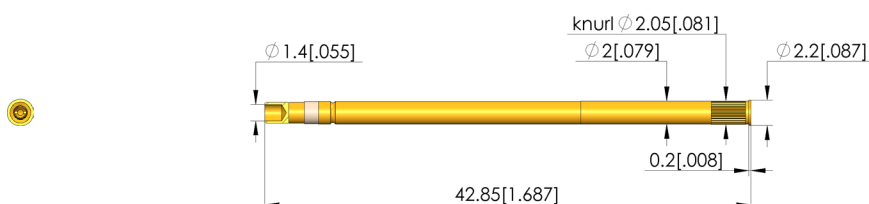

### General data

Product group:	Receptacles (KS)
Series:	KS-215
Sub-series:	KS-215 M-F screw-in version Schnellwechselsystem
Type of receptacle connection:	Plug / open
Press ring:	No
Surface area:	Gold
Collar diameter:	2.2 mm [.086 in]
Collar height:	0.2 mm [.007 in]
Knurl:	Yes
Vacuum-tight:	yes (< 1 ccm / min)
RoHS-compliant:	Yes

### Mechanical data

Total length:	42.9 mm [1.68 in]
Outer diameter:	2 mm [.078 in]

### Mounting hole

Mounting hole in CEM1:	2 - 2.02 mm [.078 - .079 in]
Mounting hole in FR4:	2 - 2.02 mm [.078 - .079 in]

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 06/26\_GB

Learn more about  
Test probes



ingun.com