

Interface support

SSA-PYLON-16-MAXx13

Item 114035



GO TO PRODUCT


ingun[®]

Partner for Future Technology

- Interface support für INGUN Pylon interface
- Ideally designed for MA xx13 test fixtures
- Quick, easy installation on the back of the test fixture
- Reliable connection from test fixture to system interface

Application

The interface frame (SSA) is used for reliable connection of the interface (SST) to the test fixture.

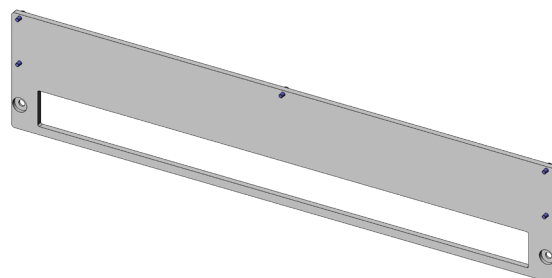

General data

Product group:

Series:

Type:

Version:

Accessory type:

Scope of delivery:

Width:

Height:

Weight:

Min. temperature:

Max. temperature:

RoHS-compliant:

Housing

SSA-MAXxxx

Pylon 16

MA xx13

Additional function

Unassembled

6 mm [.236 in]

128 mm [5.03 in]

0.9 kg [1.98 lbs]

10 °C [50 °F]

60 °C [140 °F]

Yes

Compatible with

Manual test fixtures (MA):

Accessories:

MA xx13

SST-PYLON-16

Technical data

Length:

600 mm [23.6 in]

Outer dimensionS (WxDxH):

600 x 6 x 128 mm [23.6 x .236 x 5.03 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162

78467, Constance, Germany

Phone +49 7531 8105-0

Customer hotline +49 7531 8105-888

Fax +49 7531 8105-65

info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 05/26_GB

Learn more about
Test fixture kits

