

Vacuum seal

VD-Z-21-300-200-2

Item 107048



GO TO PRODUCT

ingun[®]

Partner for Future Technology

- VA-freie-Zone-Dichtung mit fixen Außenmaßen
- Compatible with VA 40xx test fixtures


Application

Vakuumdichtungen werden in Vakuum-Prüfadaptern verwendet, um ein prozessstabiles Vakuum zu erzeugen, zur Durchführung zuverlässiger Tests (ICT/FCT) an elektronischen Leiterplatten.



Note:

Vakuumdichtungen mit der Bezeichnung „VD-Z“ werden zur Gestaltung von vakuumfreien Zonen verwendet, um elektronische Leiterplatten unter normalen Umgebungsbedingungen (Standardatmosphäre) prüfen zu können.

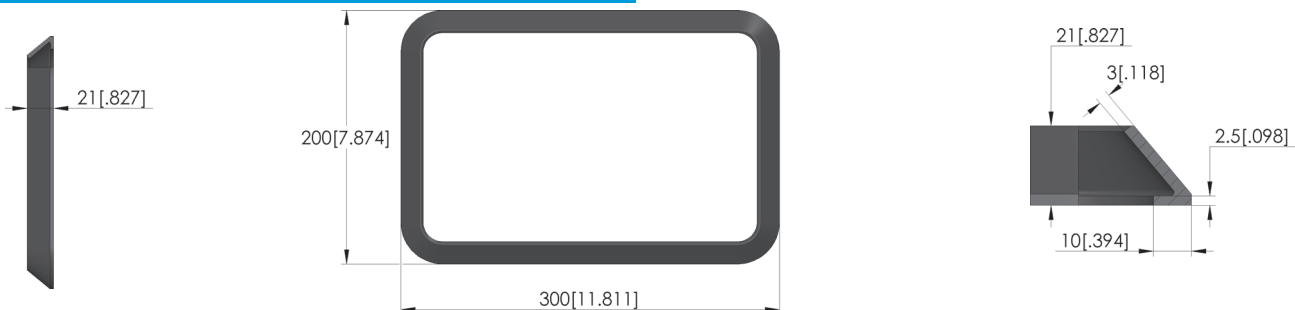

General data

Product group:	Spare part kits
Series:	VD-Z
Type:	Vacuum-free zone seal
Version:	Fixed outer dimensions
Accessory type:	Customising accessories
Width:	300 mm [11.8 in]
Height:	21 mm [.826 in]
Weight:	0.12 kg [.264 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

Compatible with

Vacuum test fixtures (VA): VA 30xx

Technical data

Useable area (WxD):	273 x 154 mm [10.7 x 6.06 in]
Length:	200 mm [7.87 in]
Outer dimensionS (WxDxH):	300 x 200 x 21 mm [11.8 x 7.87 x .826 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 06/26_GB

Learn more about
Test fixture kits

