

# Test Probe

## GKS-081 354 050 A 0800


Item GKS-081-0007



GO TO PRODUCT

**ingun**<sup>®</sup>

Partner for Future Technology

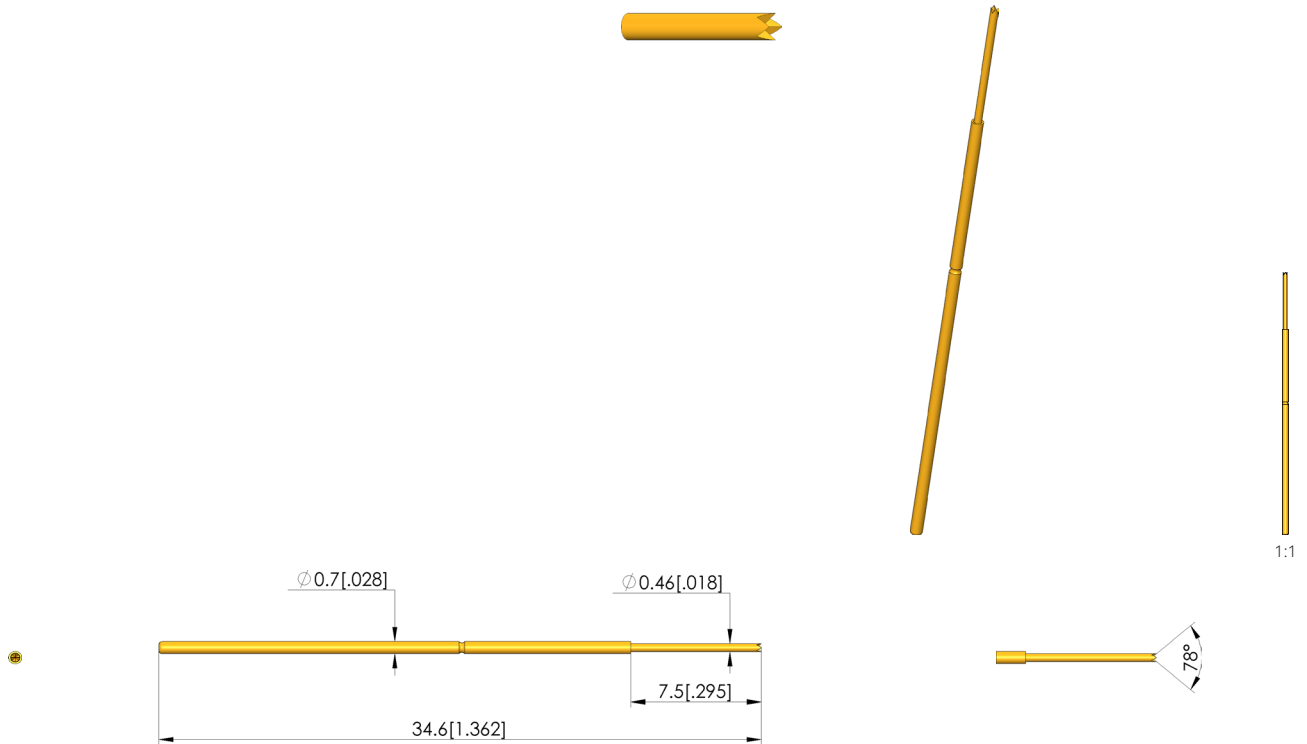

### General data

Product group:	ICT / FCT (in-circuit test and function test)
Sub-product group:	Fine-pitch
Series:	GKS-081..00 installation with KS
Grid:	1 mm [39.3 mil]
Contacting from:	Pad
Magnetic:	Yes
Installation type:	Plug-in
Quick-exchange system:	Yes
Adjustable installation height:	No
Non-rotating:	No
Compatible receptacle(s):	KS-081
Min. temperature:	-40 °C [-40 °F]
Max. temperature:	80 °C [176 °F]
RoHS-compliant:	Yes

### Tip style data

Tip style:	54 4-point crown, special length
Tip diameter:	0.5 mm [.019 in]
Tip style surface:	A gold
Tip style material:	3 CuBe

### Electrical data

Current load capacity / rated current:	3 A
Typical resistance (Ri):	30 mOhm

### Mechanical data

Total length:	34.6 mm [1.36 in]
Barrel diameter:	0.7 mm [.027 in]
Maximum stroke:	7.5 mm [.295 in]
Spring pre-load:	0.2 N [.719 ozf]
Collar height:	00
Spring force at working stroke:	0.8 N [2.87 ozf]
Recommended working stroke:	5.5 mm [.216 in]

# Test Probe

## GKS-081 354 050 A 0800


Item GKS-081-0007



GO TO PRODUCT

# ingun®

Partner for Future Technology

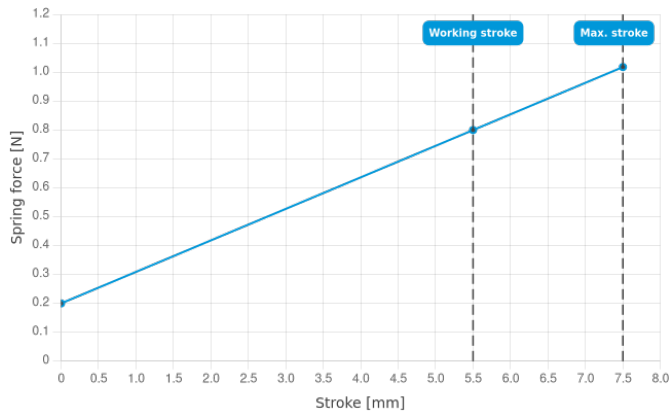

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 05/26\_GB

Learn more about  
ICT/FCT Test probes



ICT/FCT TEST PROBES

ingun.com