

Button activator

TAB-M-10-5

Item 19637



GO TO PRODUCT


ingun®

Partner for Future Technology

- Reliable actuation of push-buttons and spring-loaded switches
- Quick, easy, space-saving installation
- Freely-adjustable positioning thanks to the threaded connection
- Not air-tight


Application

Button activators (TAB) can be used for space-saving actuation of push-buttons and spring-loaded switches on the PCB during testing. They are actuated manually.




Delivery

Delivered partially assembled, tip is enclosed .

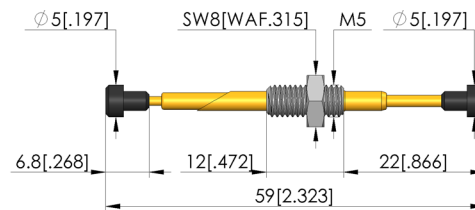

Maximum stroke

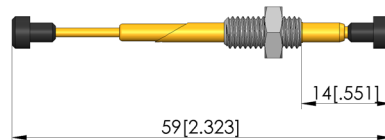

General data

| | |
|--------------------|-----------------------------------|
| Product group: | Button activator |
| Series: | TAB |
| Type: | Button actuator (TAB), manual |
| Version: | 59 long |
| Accessory type: | Customising accessories |
| Scope of delivery: | Partially assembled, tip enclosed |
| Width: | 9.5 mm [.374 in] |
| Weight: | 0.01 kg [.022 lbs] |
| Min. temperature: | 10 °C [50 °F] |
| Max. temperature: | 60 °C [140 °F] |
| RoHS-compliant: | Yes |

Compatible with

| | |
|--------------------------------|------------|
| Exchangeable kits version: | No RF |
| Manual test fixtures (MA): | MA 2012 |
| MA exchangeable kits (ATS MA): | ATS MAxx |
| PA exchangeable kits (ATS PA): | ATS PAZxxx |
| For dual-stage contacting: | Yes |

Technical data

| | |
|--------------------|-----------------|
| Stroke: | 8 mm [.314 in] |
| Tip diameter: | 5 mm [.196 in] |
| Installation: | Thread M5 |
| Installation grid: | 10 mm [.393 in] |
| Length: | 59 mm [2.32 in] |

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 06/26_GB