


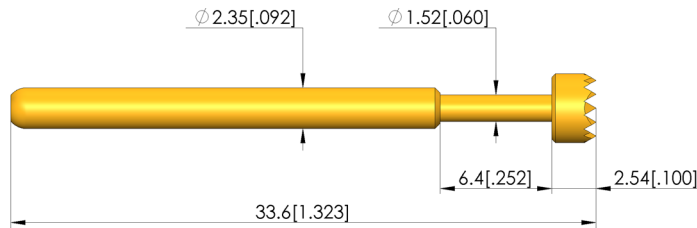




GO TO PRODUCT

- Robust, compact design for harsh ICT/FCT applications with limited space
- For optimum contact at the test points (e.g. pads, vias, and pins), various tip styles in different diameters and finishes, as well as various spring forces are available. Spring forces.

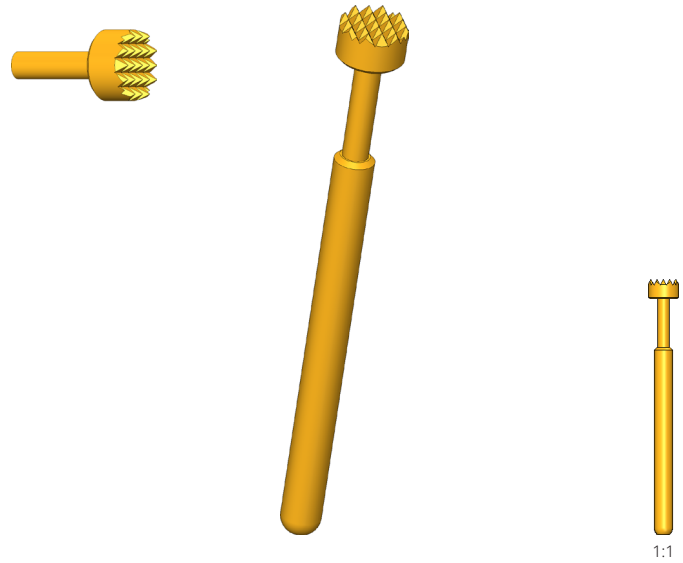

### General data

Product group:  
 Sub-product group:  
 Series:  
 Grid:  
 Contacting from:  
 Magnetic:  
 Installation type:  
 Quick-exchange system:  
 Adjustable installation height:  
 Non-rotating:  
 Compatible receptacle(s):  
 Min. temperature:  
 Max. temperature:  
 RoHS-compliant:

ICT / FCT (in-circuit test and function test)  
 Short/robust GKS  
 GKS-004  
 4.75 mm [187 mil]  
 Post  
 Yes  
 Plug-in  
 Yes  
 No  
 No  
 KS-004  
 -40 °C [-40 °F]  
 80 °C [176 °F]  
 Yes

### Tip style data

Tip style: 06 serrated  
 Tip diameter: 3.96 mm [.155 in]  
 Tip style surface: A gold  
 Tip style material: 2 steel

### Electrical data

Current load capacity / rated current: 6 A  
 Typical resistance (Ri): 20 mOhm

### Mechanical data

Total length: 33.6 mm [1.32 in]  
 Barrel diameter: 2.36 mm [.092 in]  
 Maximum stroke: 6.35 mm [.25 in]  
 Spring pre-load: 1.53 N [5.5 ozf]  
 Collar height: 00  
 Spring force at working stroke: 3 N [10.7 ozf]  
 Recommended working stroke: 4.4 mm [.173 in]

# Test Probe


## GKS-004 206 396 A 3000

Item GKS-004-0013



**ingun**<sup>®</sup>

Partner for Future Technology

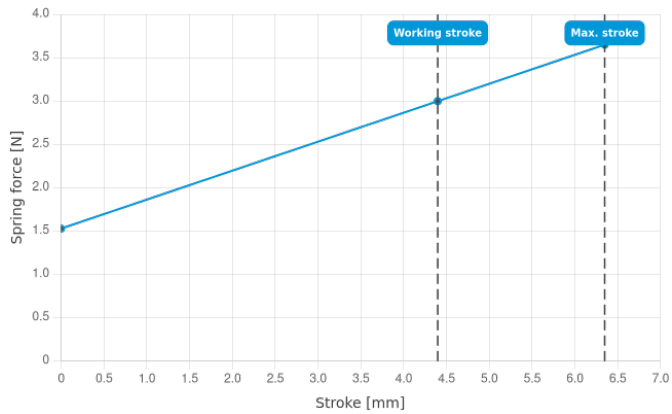

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 05/26\_GB

Learn more about  
ICT/FCT Test probes



ingun.com