



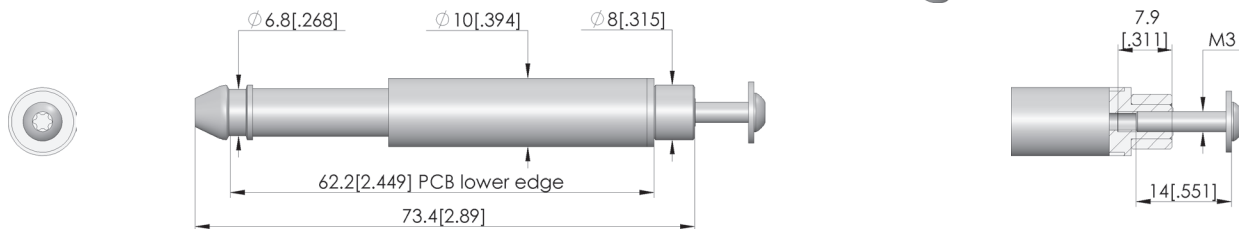

- Bending pin for lifting unit FB-AHE-ATSMAXx
- To securely hold the lifted PCB
- Quick, easy installation
- Für PCBs up to 2.4 mm
- Allowed PCB tolerance (length / width): + 0.5 / - 0.2 mm

Application

The bending pin is used with FB-AHE-ATSMAXx lifting units to securely hold the lifted PCB.

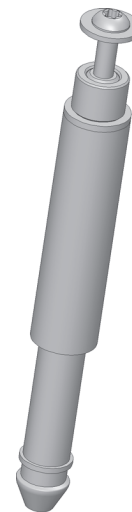

General data

Product group:	Mechanical accessory
Series:	MBS
Type:	Bending pin
Version:	Single-stage contacting
Accessory type:	Additional function
Scope of delivery:	Includes M3x14 T10 screws
Weight:	0.01 kg [0.022 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

Compatible with

Exchangeable kits version:	No limitations
MA exchangeable kits (ATS MA):	ATS MAXx

Technical data

Force:	1 N [3.59 ozf]
Installation:	Thread M3
Length:	73.4 mm [2.88 in]
Diameter:	10 mm [0.393 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

