

Receptacle KS-003 30 G

Item KS-00330G




GO TO PRODUCT


ingun[®]

Partner for Future Technology

INGUN SELECTION

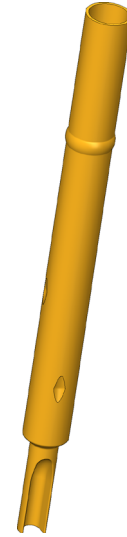

1:1

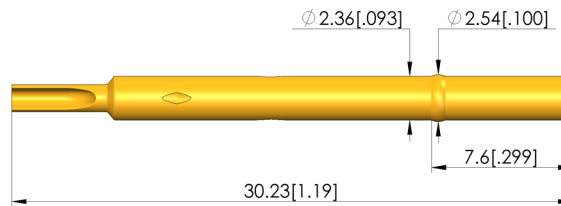

General data

Product group:
Series:
Sub-series:
Type of receptacle connection:
Press ring:
Surface area:
Collar diameter:
Collar height:
Knurl:
Vacuum-tight:
RoHS-compliant:

Receptacles (KS)
KS-003
KS-003 press-in version
Solder
Yes
Gold
2.49 mm [.098 in]
7.6 mm [.299 in]
No
No
Yes

Mechanical data

Total length: 30.2 mm [1.18 in]
Outer diameter: 2.36 mm [.092 in]

Mounting hole

Mounting hole in CEM1: 2.33 - 2.34 mm [.091 - .092 in]
Mounting hole in FR4: 2.33 - 2.34 mm [.091 - .092 in]
Mounting hole with press ring in CEM1: 2.39 - 2.44 mm [.094 - .096 in]
Mounting hole with press ring in FR4: 2.39 - 2.44 mm [.094 - .096 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 06/26_GB

Learn more about
Test probes

