

Vacuum cassette VK VA4060/PG16

Item 113757



GO TO PRODUCT

ingun[®]


Partner for Future Technology

Application

Vacuum cassette for vacuum test fixtures VA 40xx for modular test fixture configuration.

Version

Can be upgraded for dual-stage contacting

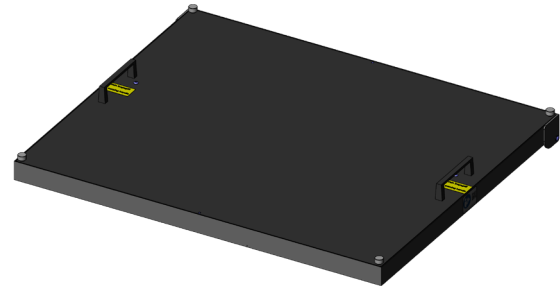

General data


Product group:	Vacuum cassettes
Series:	VK-VAxxxx
Type:	VA 4060
Version:	1-stage / 2-stage
Accessory type:	Additional function
Scope of delivery:	Includes seal, installation accessories
Contact stroke generation:	Vacuum
Width:	660 mm [25.9 in]
Height:	99.5 mm [3.91 in]
Weight:	12 kg [26.4 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

Compatible with

Vacuum test fixtures (VA): VA 4060

Technical data

Parallel stroke:	12.8 mm [.503 in]
Useable area (WxD):	550 x 430 mm [21.6 x 16.9 in]
Length:	546 mm [21.4 in]
Outer dimensionS (WxDxH):	660 x 546 x 99.5 mm [25.9 x 21.4 x 3.91 in]

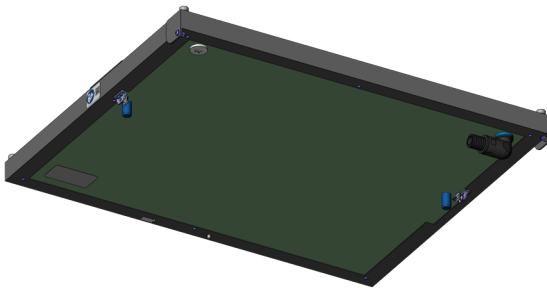

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 05/26_GB

Learn more about
Test fixture kits

